



## Display Setup Instructions



10' x 20' Display Booth  
(L-Shape Right)

10' x 20' Display Booth  
(L-Shape Left)



### Alternate Configurations:



10' x 10'  
(L-Shape Right)

10' x 10'  
(L-Shape Left)






### Steps to Assemble the InfiniLite Multi Section Exhibit Booth:


- Step 1:** Assemble Pillars, Corner Pillars, and Short Pillar.
- Step 2:** Place Pillars upright in their proper order and locations.
- Step 3:** Attach Wall Panels to Pillars.
- Step 4:** Install Shelf Support Bars and Light Bars into sides of Pillars.
- Step 5:** Install Storage Doors.
- Step 6:** Attach Fluorescent Lights to Bars and connect in series.
- Step 7:** Attach Shelves to Shelf Support Bars with Velcro.
- Step 8:** Attach Signs to Pillars with Velcro.
- Step 9:** Attach Posters along the Backwall with Velcro.
- Step 10:** Attach Stem Lights to tops of Pillars.
- Step 11:** Assemble Counters and Pedestals and place them within the Booth area.

**Assemble Pillars.**


A) Unfold the Pillar Panels with the front sides facing downward.

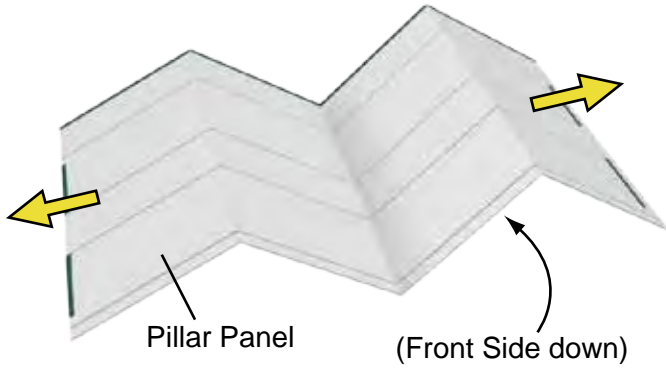



B) Attach Top and Bottom Supports to the back of the Pillars with Velcro.

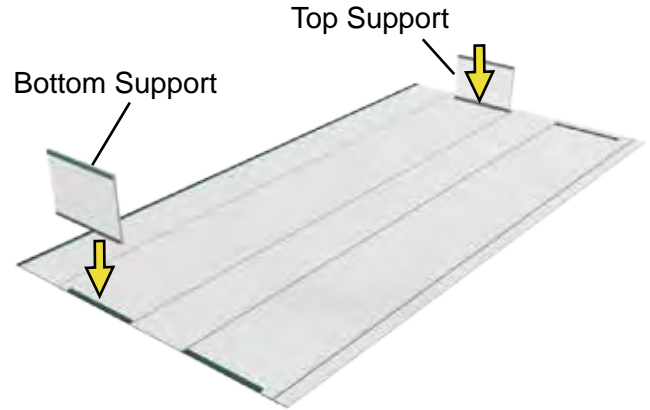

C) Fold Pillar around the Supports and attach with Velcro.

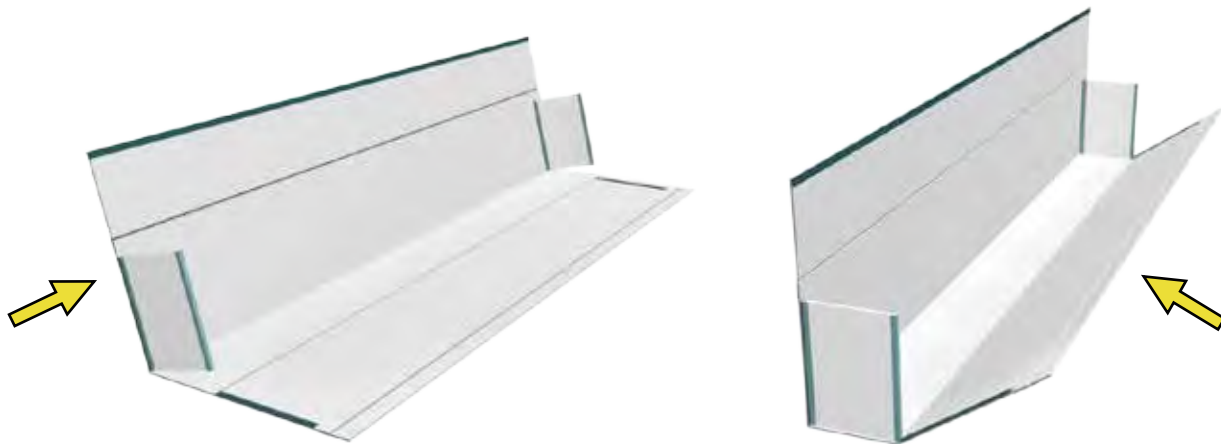


D) Close the Pillar using the Velcro strips along the Pillar edges.

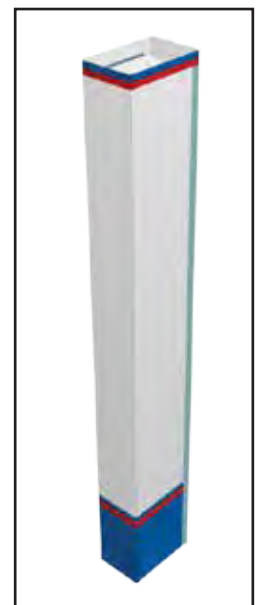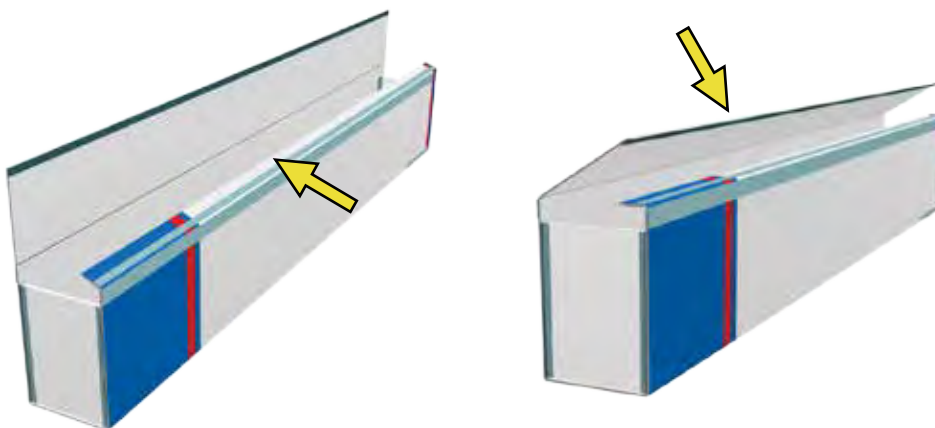


Assembled Pillar

**Assemble Corner Pillars.**

E) Unfold the Corner Pillar Panels with the front sides facing downward.

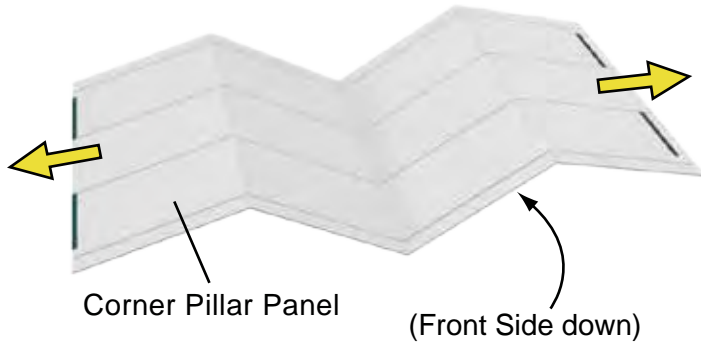


F) Attach Top and Bottom Supports to the back of the Corner Pillars with Velcro.

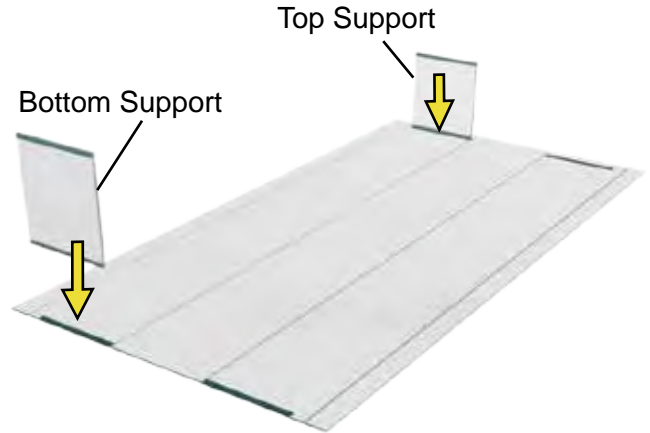

G) Fold the Corner Pillar around the Supports and attach with Velcro.




H) Attach the Back Cover to the bottom half of the Corner Pillar with Velcro; unfold the Back Cover; then attach the remaining Back Cover to the upper half of the Corner Pillar.

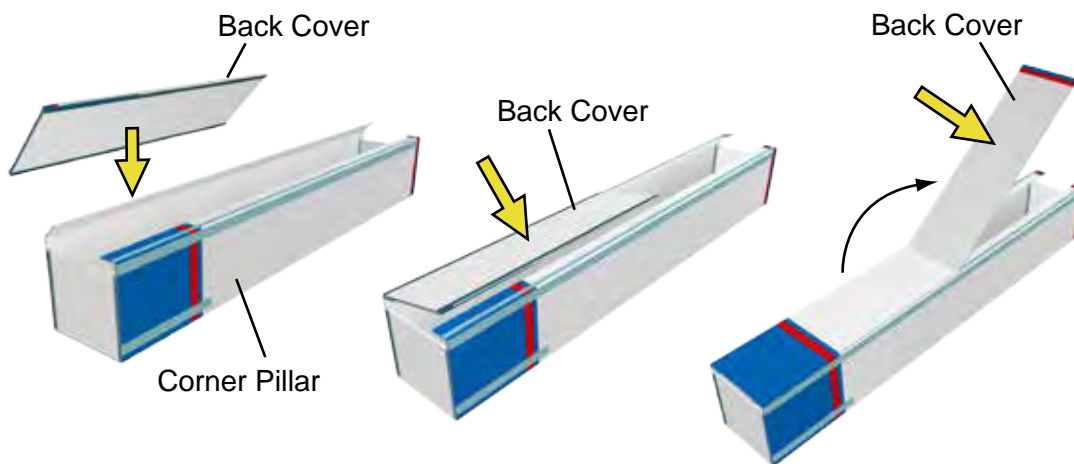


**Assemble the Short Pillar.**


A) Unfold the Short Pillar Panel with the front sides facing downward.

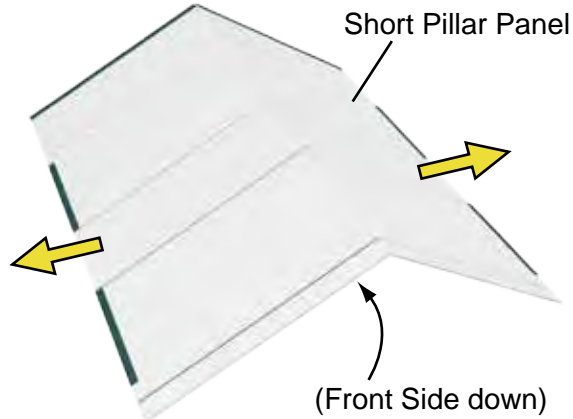


B) Attach Top and Bottom Supports to the back of the Short Pillar with Velcro.

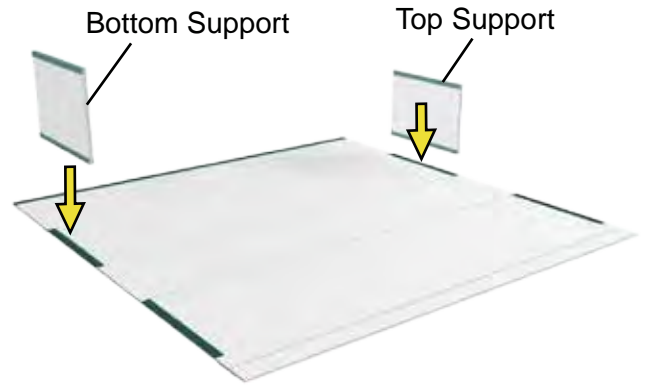

C) Fold Short Pillar around the Top and Bottom Supports and attach with Velcro.

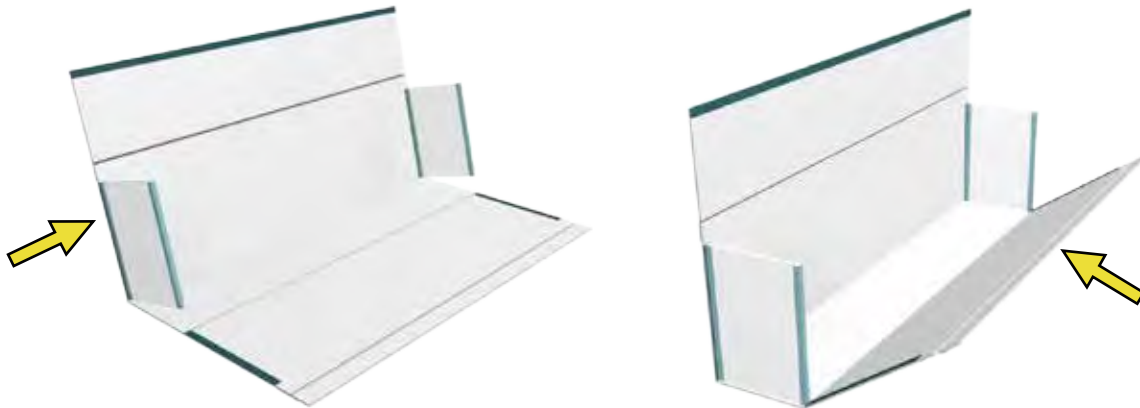

D) Close the Short Pillar using the Velcro strips along the edges.

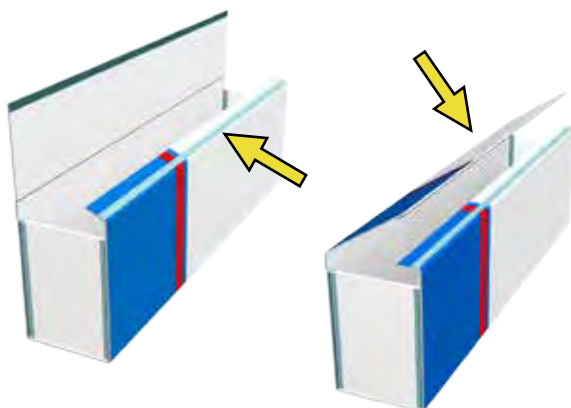

E) Attach Pillar Top to the Short Pillar with Velcro.




Assembled Short Pillar

## Assembly Instructions:

## 10'x20' Multi Section Shelf & Poster Display

The following Floor Plan identifies the locations of the Booth Components when the Display is assembled as a 10'x20' L-Shape/Right configuration:

### TOP VIEW Floor Plan: 10'x20' L-Shape/Right

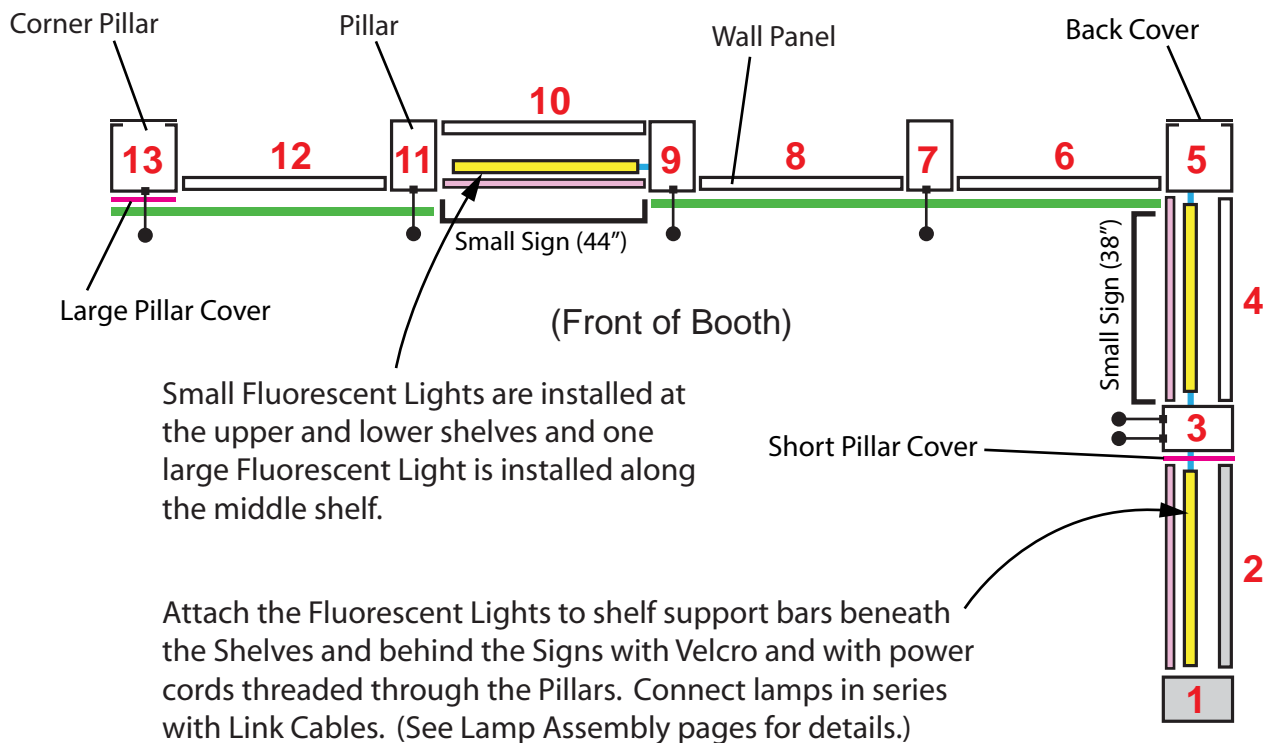

### LEGEND

	Storage Doors
	Poster
	Fluorescent Light
	Pillar Cover
	Stem Light
	Short Pillar
	Short Wall Panel


# Assembly Instructions:

## 10'x20' Multi Section Shelf & Poster Display

The following Floor Plan identifies the locations of the Booth Components when the Display is assembled as a 10'x20' L-Shape/Left configuration:



**TOP VIEW**  
**Floor Plan: 10'x20'**  
**L-Shape/Left**

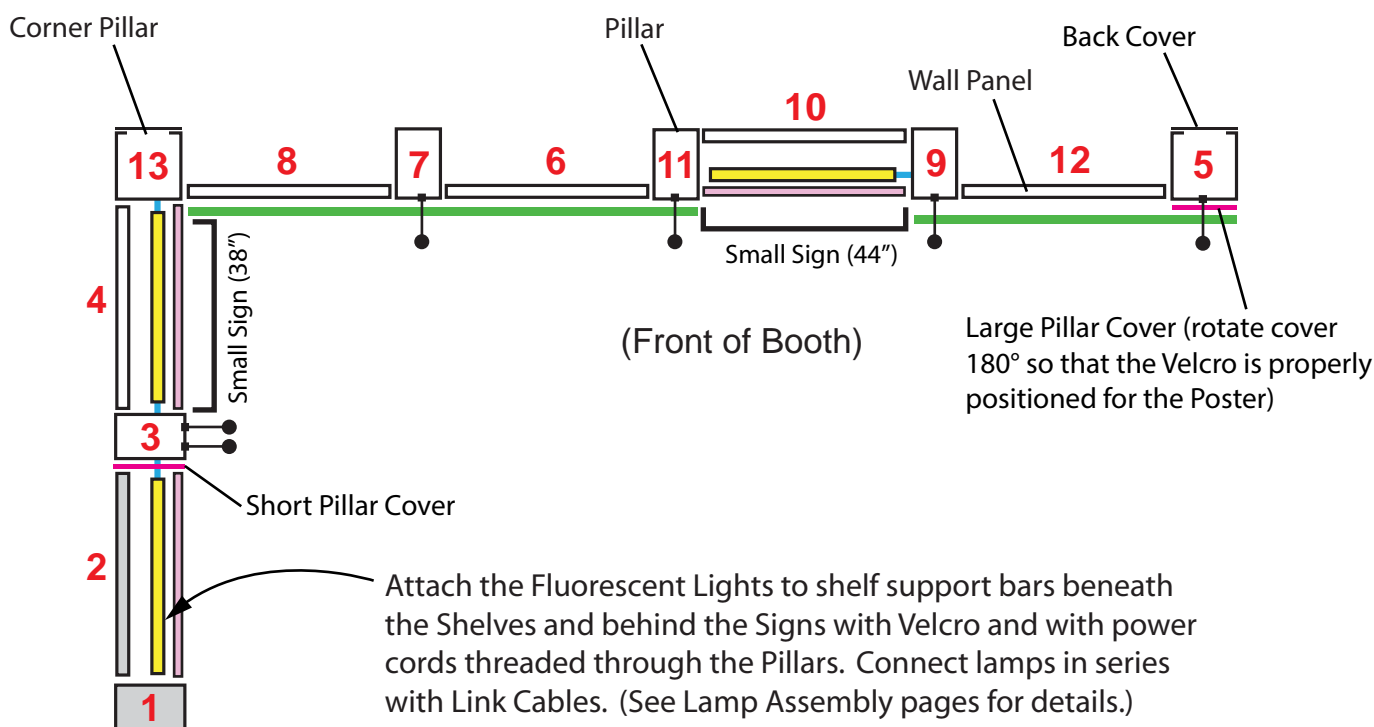

### LEGEND


	Storage Doors
	Poster
	Fluorescent Light
	Pillar Cover
	Stem Light
	Short Pillar
	Short Wall Panel

## Assembly Instructions:


## 10'x20' Multi Section Shelf & Poster Display

### Alternate Booth Assemblies (10'x10's).

- A) The 10'x20' Display Booth can be assembled as two 10'x10' Displays.
- B) The following Floor Plans identify the locations of the 10'x10' Booth Components.

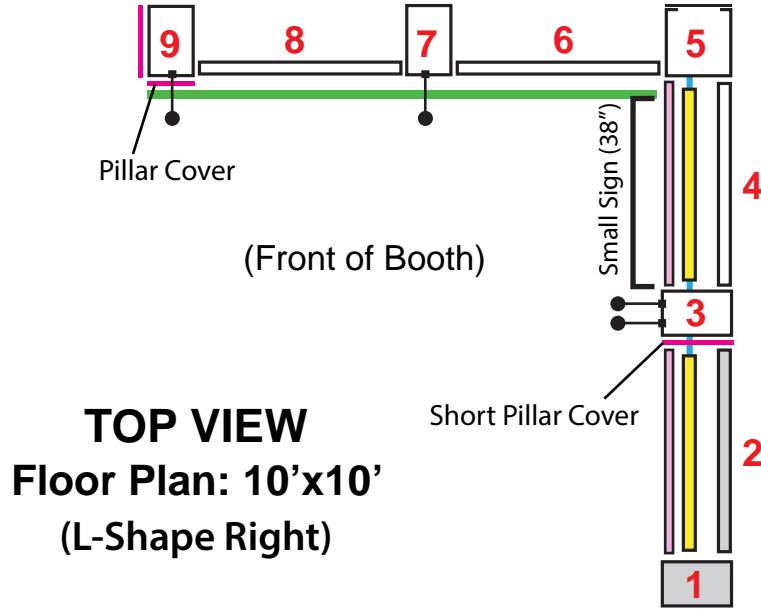

10' x 10'  
(L-Shape Right)

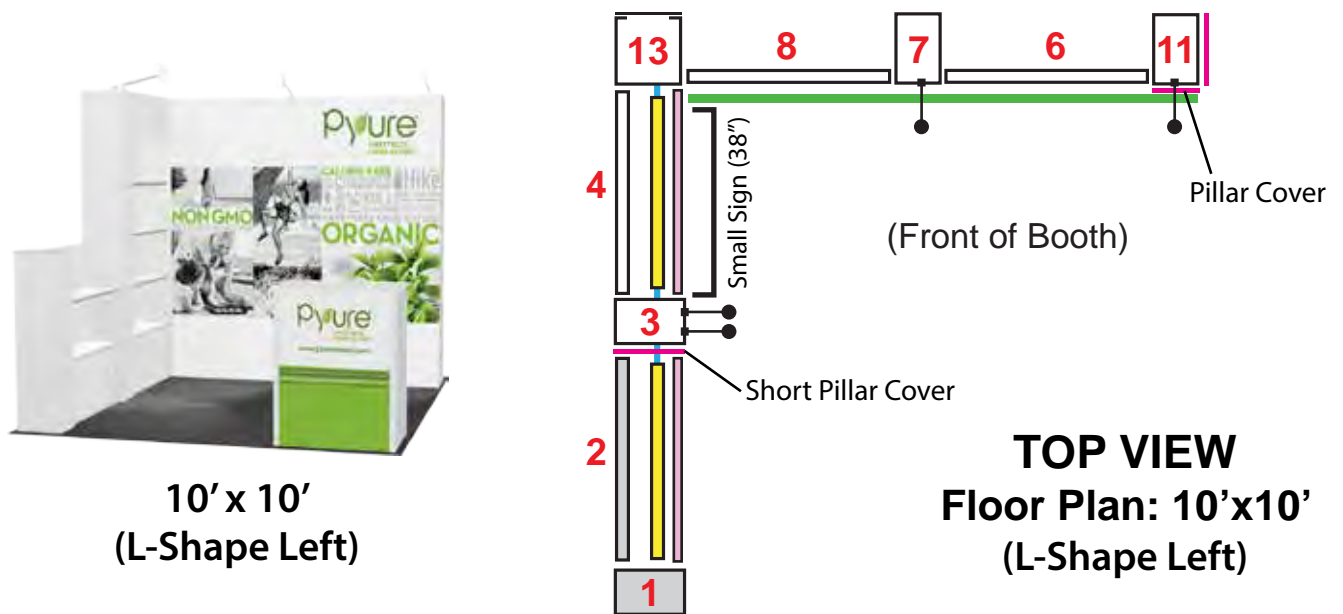

10' x 10'  
(L-Shape Left)




**Assembly Instructions:**

**10'x20' Multi Section Shelf & Poster Display**

Place the assembled Pillars and Corner Pillars upright in their proper order and assigned locations as numbered and indicated on the Floor Plan.


**Floor Plan: 10'x20'  
L-Shape/Right (shown)**

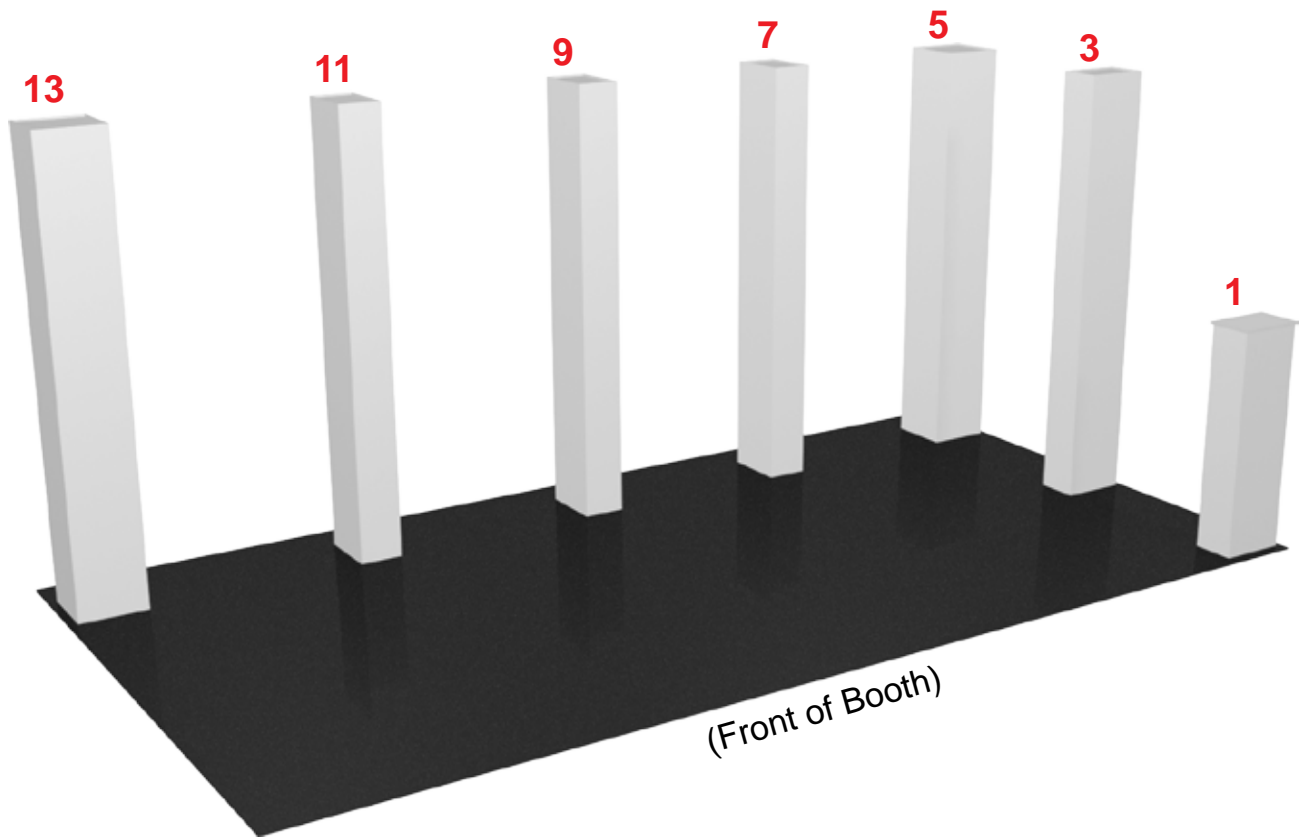


**NOTE:** Place the Pillars and Corner Pillars in their proper locations per the Floor Plans when assembling the Booth in the alternate configuration.

**Attach Wall Panels to Pillars.**

A) Unfold the bottom half of the Wall Panel, hold upright and attach to the side of the Pillar with Velcro. (Make sure that the Pillar and Wall Panel are **flat** on the floor surface when attaching and that the accent stripes are aligned with each other.) Begin assembly from either the left or right side of the Booth.

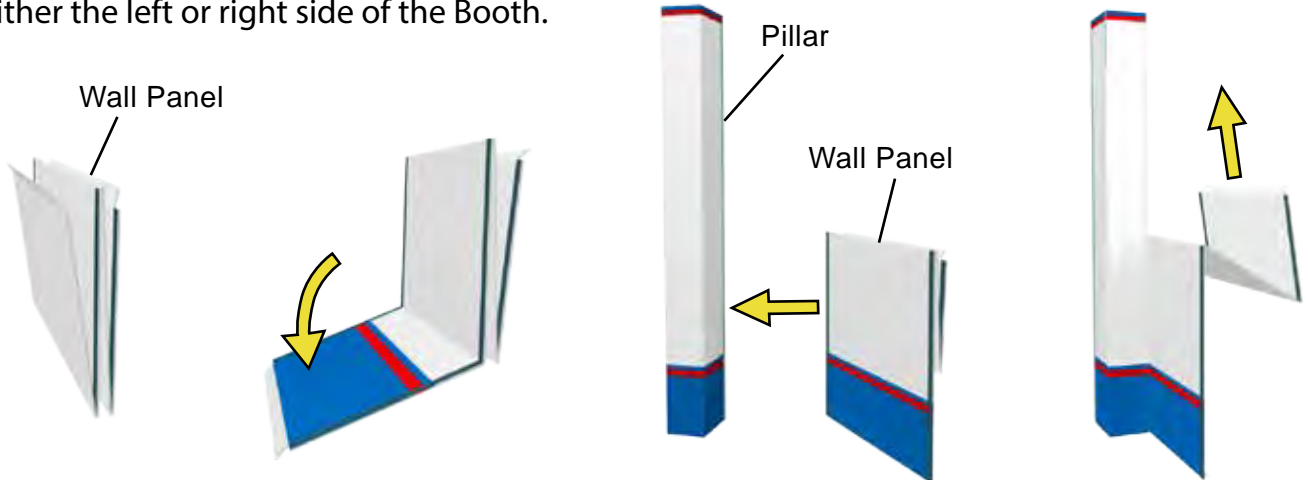

B) Unfold the top half of the Wall Panel and attach it to the top half of the Pillar matching the Velcro strips along the edges. Rotate the Wall Panel into position. Attach the next Pillar to the Wall Panel so that it is flat against the front face of the Wall Panel. Rotate the Pillar into position.

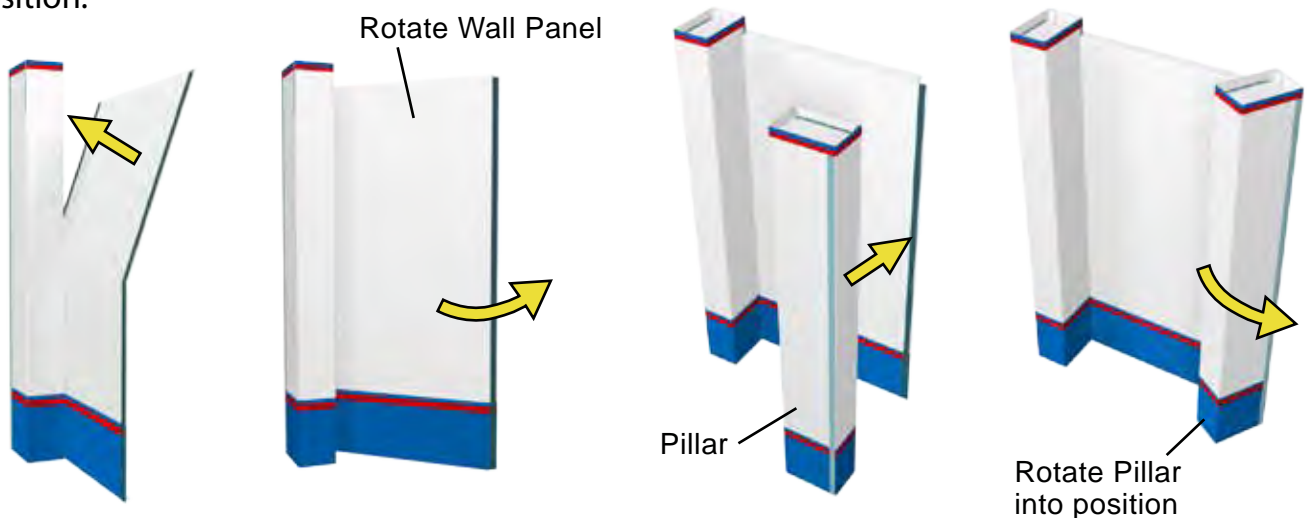


C) Repeat this process with the remaining Wall Panels and Pillars.




**Attach Short Wall Panel to Pillars.**

A) Unfold the Short Wall Panel, hold upright, and attach to Pillar with Velcro. (Make sure that the bottoms of the Pillar and Short Wall Panel are **flat** against the floor when attaching and that the accent stripes are aligned with each other.)

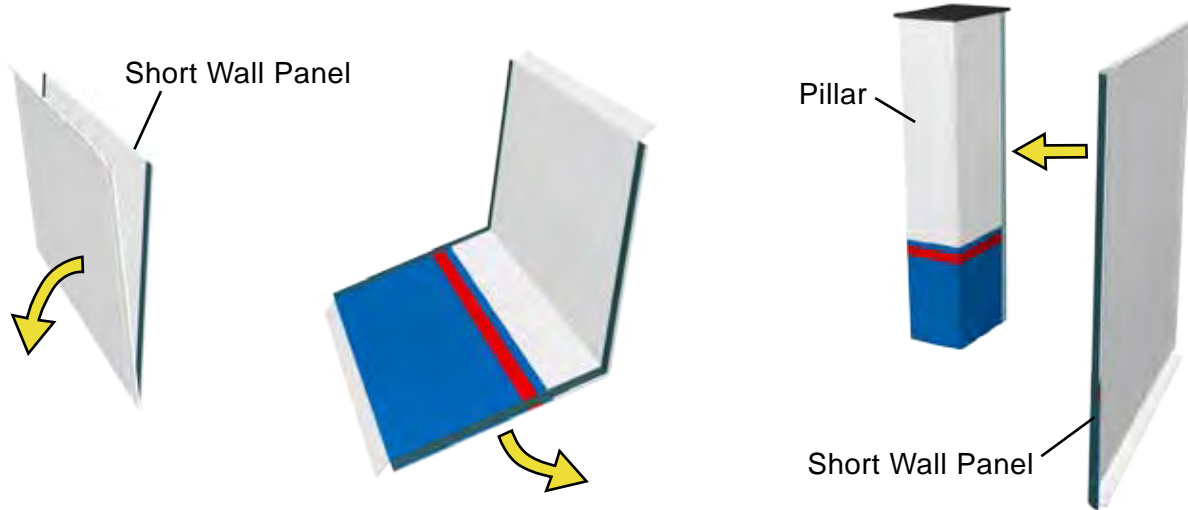

B) Rotate the Short Wall Panel into position. Attach the Short Pillar to the Short Wall Panel so that it is flat against the front face of the Short Wall Panel. Rotate the Pillar into position.

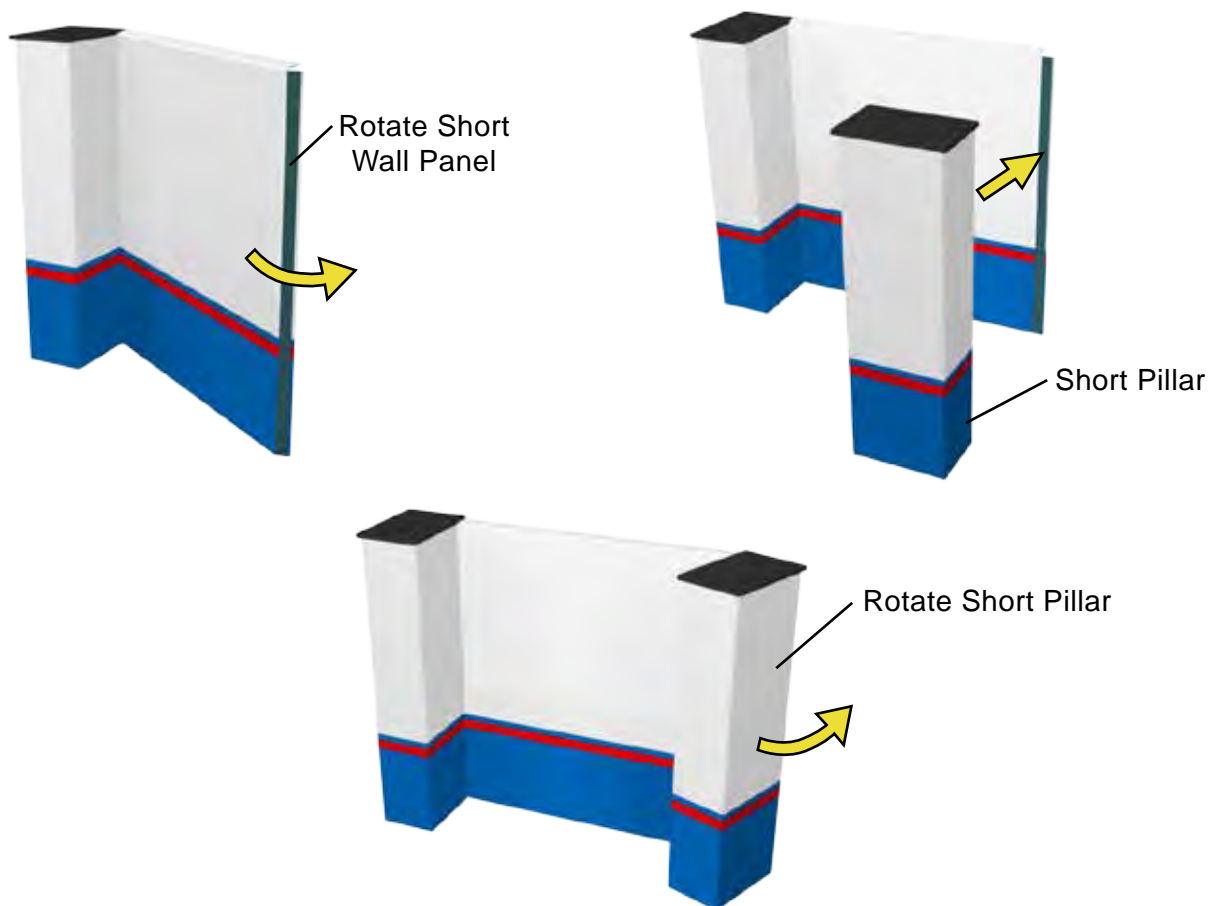


## Assembly Instructions:

# 10'x20' Multi Section Shelf & Poster Display

### Install Shelf Support Bars.


A) Insert the shelf support bars into their designated openings in the Pillars with the **back bars** first, installing from the bottom upward. Then install the **front bars** from the bottom upward.

**Make sure that the Velcro on the bars is facing up to attach the shelves and that the Velcro for the fluorescent lights is properly orientated along the front bars.**

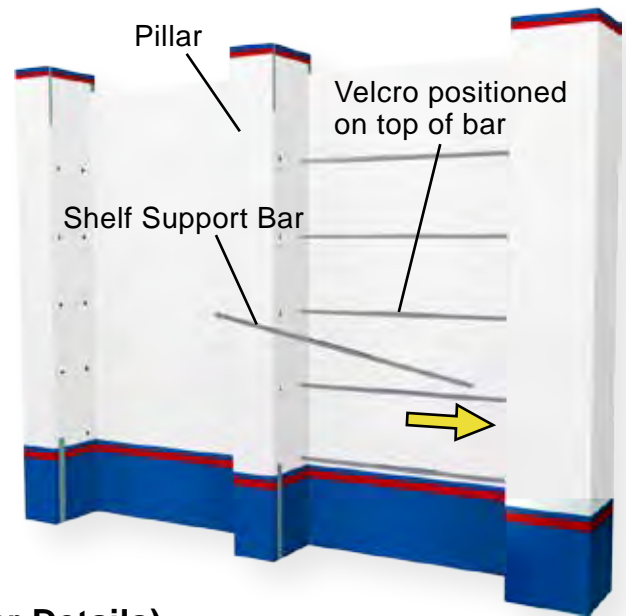

(See the following pages for Support Bar Details)

Install the Storage Doors. (Attach Storage Doors to inside of Pillars with Velcro.)

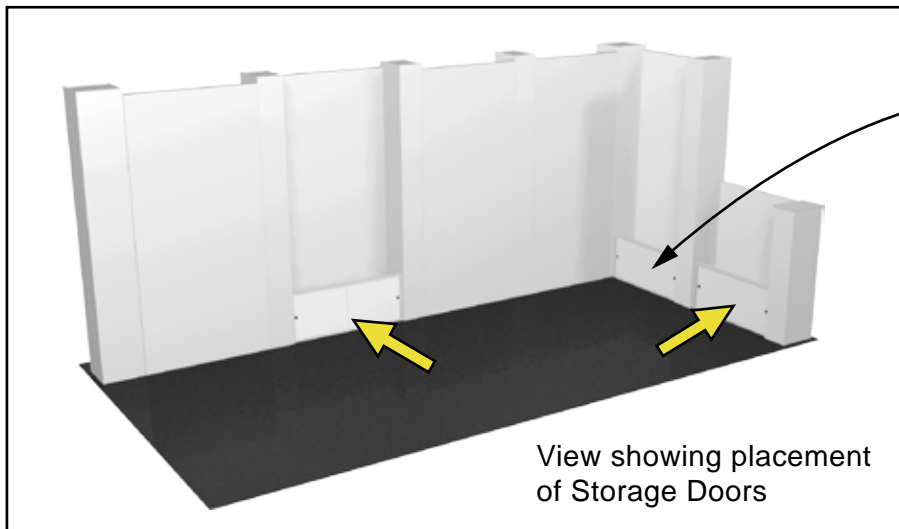


**NOTE:** Storage Doors along the siding are shorter than the one along the backwall.

**Shelf Support Bar Detail for 10'x20' Booth Configurations:**

There are two (2) sizes of Support Bars for the Shelves. The sizes and locations are shown below. Additionally, the Bars are color-coded to assist with identification during assembly.

**TOP VIEW**  
**Floor Plan: 10'x20'**  
**L-Shape/Right**

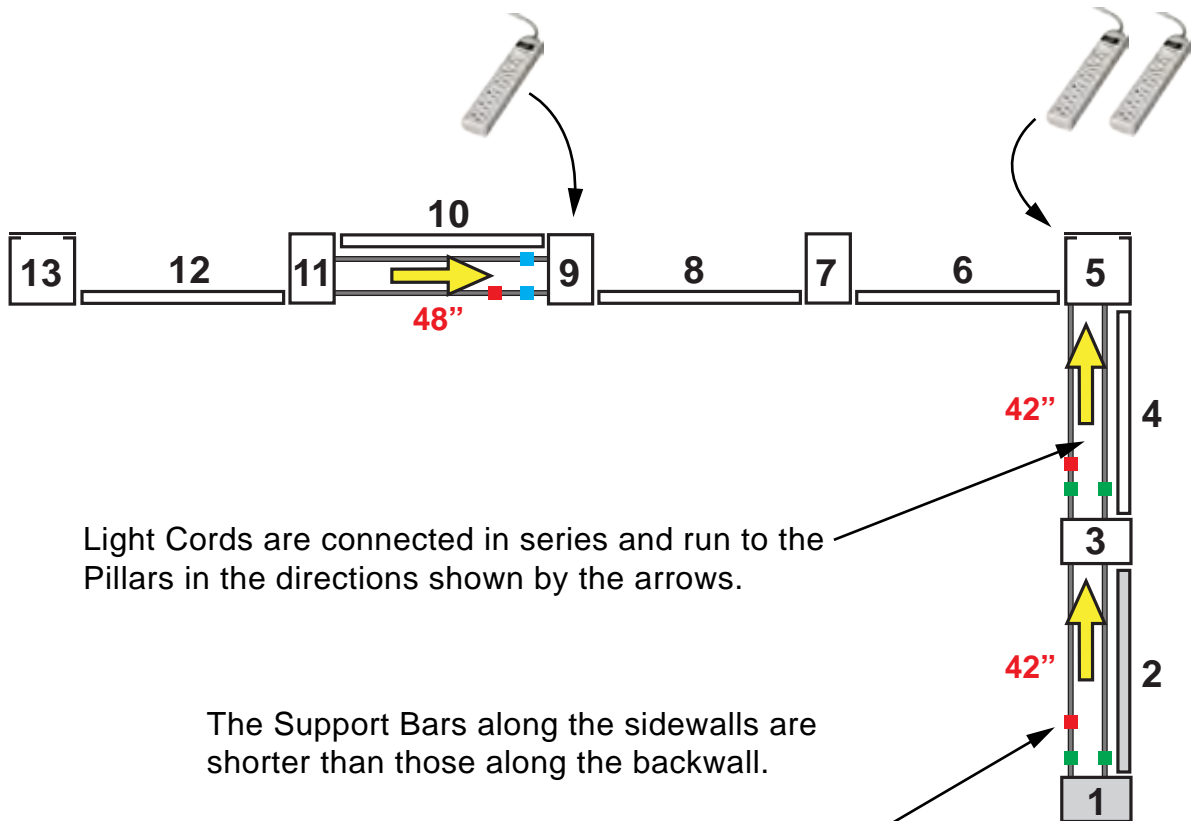

Light Cords are connected in series and run to the Pillars in the directions shown by the arrows.


The Support Bars along the sidewalls are shorter than those along the backwall.

The Front Support Bars which have extra Velcro for the Fluorescent Lights are indicated with red vinyl.

**NOTE:** Install the light bars and support bars along the backwall and side wings in a similar fashion when assembling the Booth in the alternate configuration.


Fluorescent Lamp Assembly Details

Step 1:

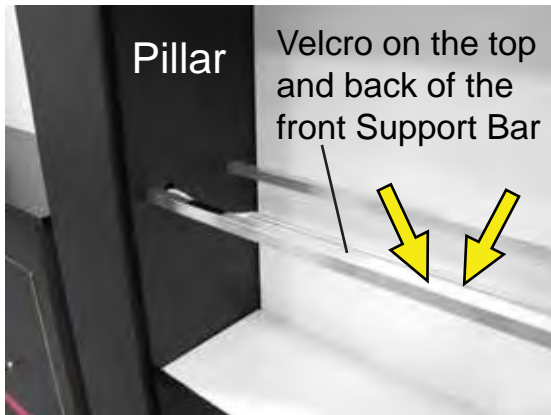

Start assembling the Fluorescent Lamps at the Pillars where the power will be connected. (Orient the Shelf Support Bars so that the Velcro is on top for the shelves and Velcro is in back of the front Bar for the Fluorescent Light.)

Step 2:

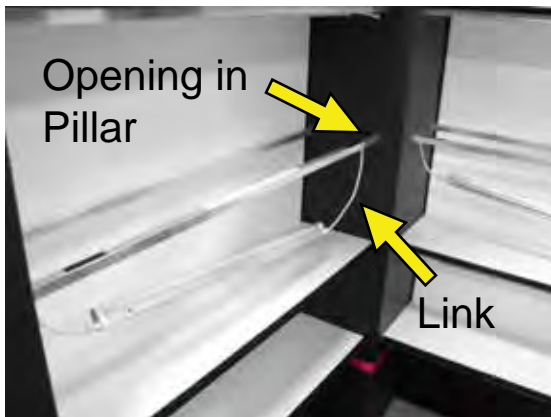

Attach Fluorescent Lights in series with Link Cables threaded through the openings in the Pillars.



Link Cable.

Step 3:



Attach the Fluorescent Lights to the back of the front Shelf Support Bars with Velcro.


Fluorescent Lamp Assembly Details

Step 4:



Support Bars for the Fluorescent Lamps at the tops of the Pillars are located behind the Signs. Assemble these bars so that the velcro is oriented to the back. Attach lights to the back of these supports with Velcro after they have been connected in series.

Step 5:

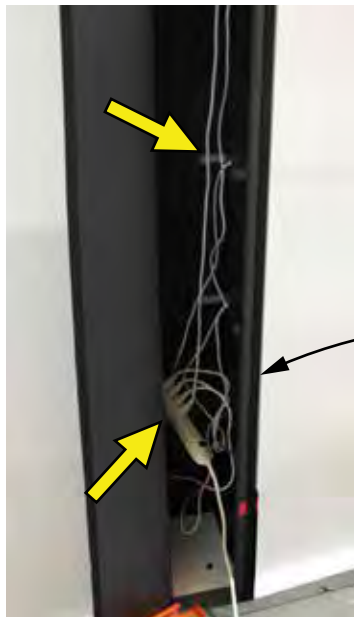

Connect the power for the Fluorescent Lights along the power strips located inside the Pillars as shown.

(Four light cords connected in series and plugged into the power strip inside the Pillar.)

Step 6:



Attach Shelves to the top of the Shelf Support Bars with Velcro.

Fluorescent Lamp Assembly Details



Light Cords are connected in series and plugged into the Corner Pillars.

View showing typical Fluorescent Light installation along Booth.




Red vinyl is placed along the front light support bars to assist in mounting the Fluorescent Lights.



**Attach Shelves to Shelf Support Bars with Velcro.**

A) Place the Shelves on top of the Shelf Support Bars and attach with Velcro.

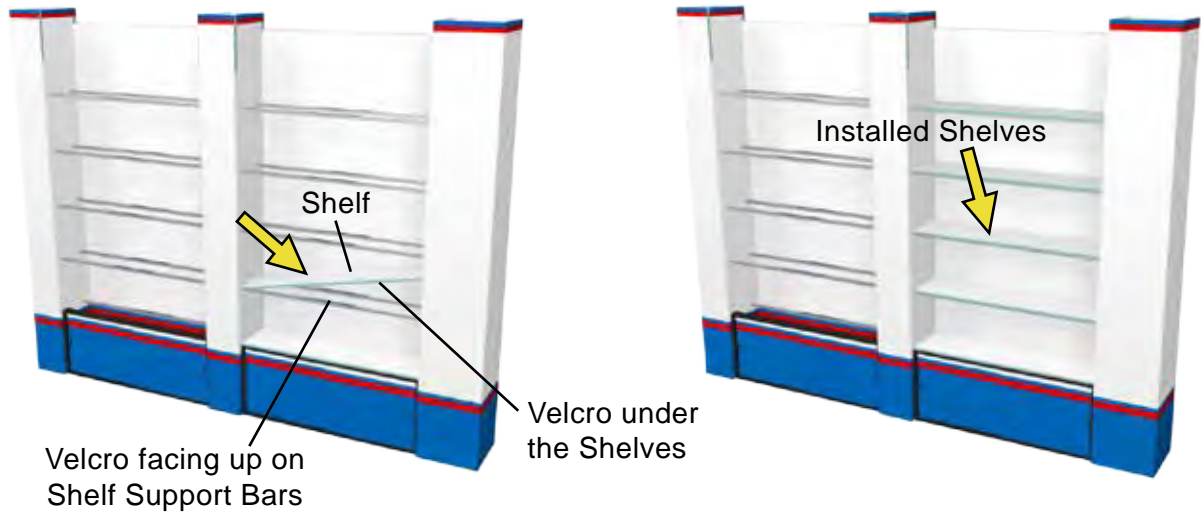


B) Insert the shelf dividers along the backwall between the Shelves. Velcro them into position.



Shelf Dividers installed along backwall

**Attach Signs to Pillars with Velcro.**

A) Attach the Signs to the inside of the Pillars with Velcro.

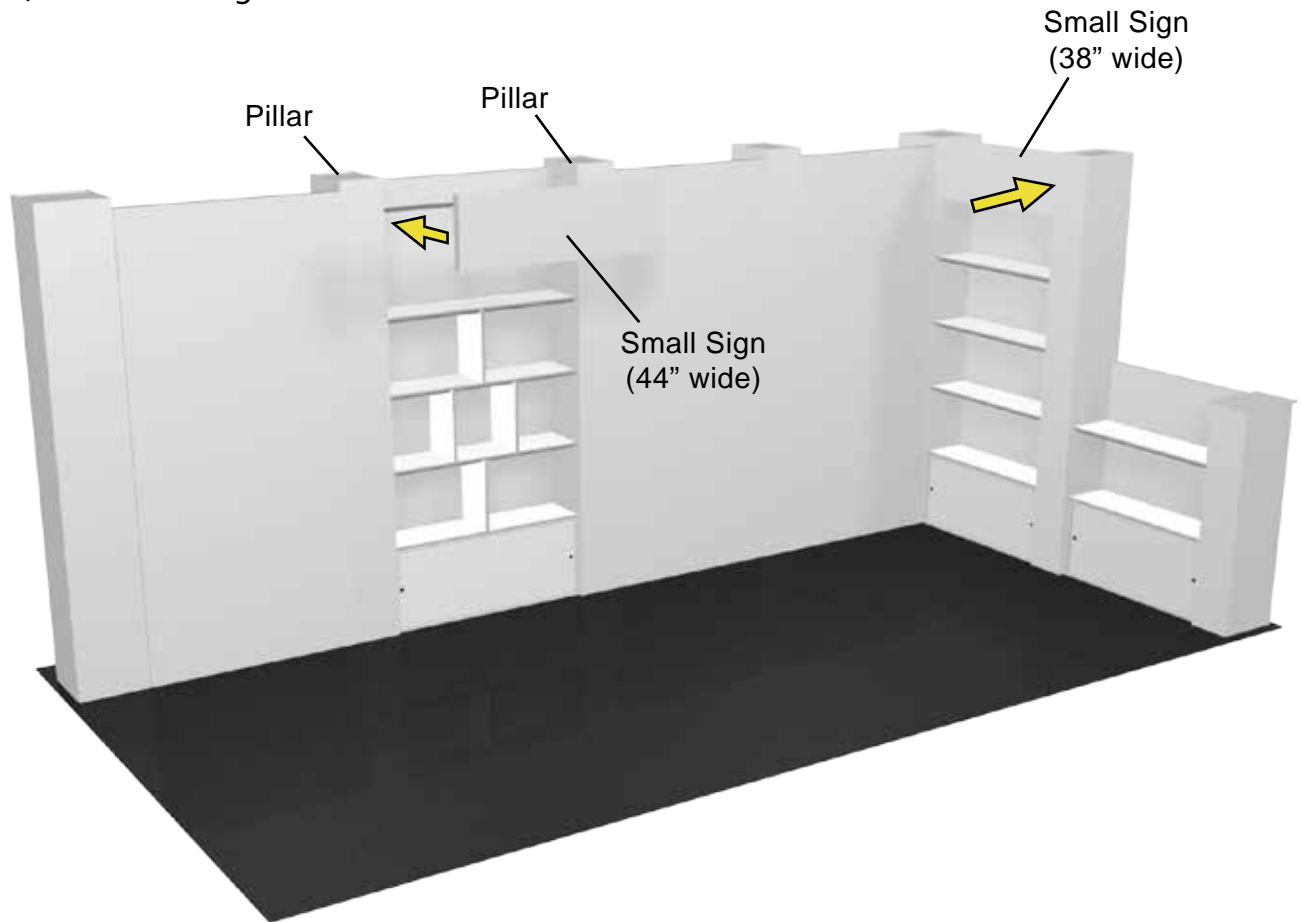

## Assembly Instructions:

## 10'x20' Multi Section Shelf & Poster Display

### Attach Posters along the Backwall with Velcro.


A) The Posters are divided into vertical sections. First attach the left sections to the Wall Panels with Velcro. Next, attach the adjacent sections from left to right with Velcro with approximately 1/4" overlap to match the text and graphic design.



**Attach the Stem Lights to the tops of the Pillars.**

A) Place a wooden Light Support Stick on top of the proper Pillars as shown. (Use a ladder or step stool to access the top of the Pillar.) Secure the Stick to the back of the Pillar with a Binder Clip.

B) Attach the Stem Light to the front end of the Pillar and Support Stick by adjusting the thumbscrew on the back of the Stem Light. (**DO NOT** overtighten the thumbscrew. Overtightening the adjustment thumbscrew may damage the Pillar.)

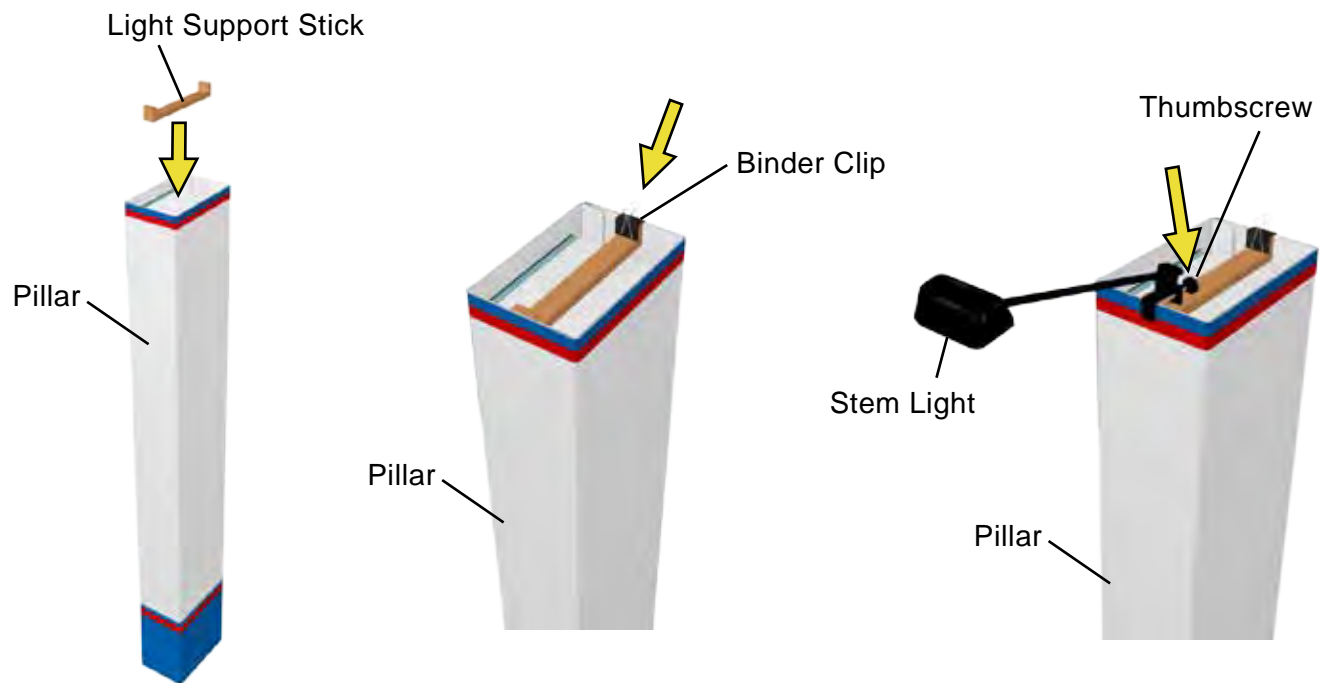


**Assembly Instructions:**


**10'x20' Multi Section Shelf & Poster Display**

**Counter Assembly:**

A) Connect the Counter Panels together with the 90° Channels and Velcro.

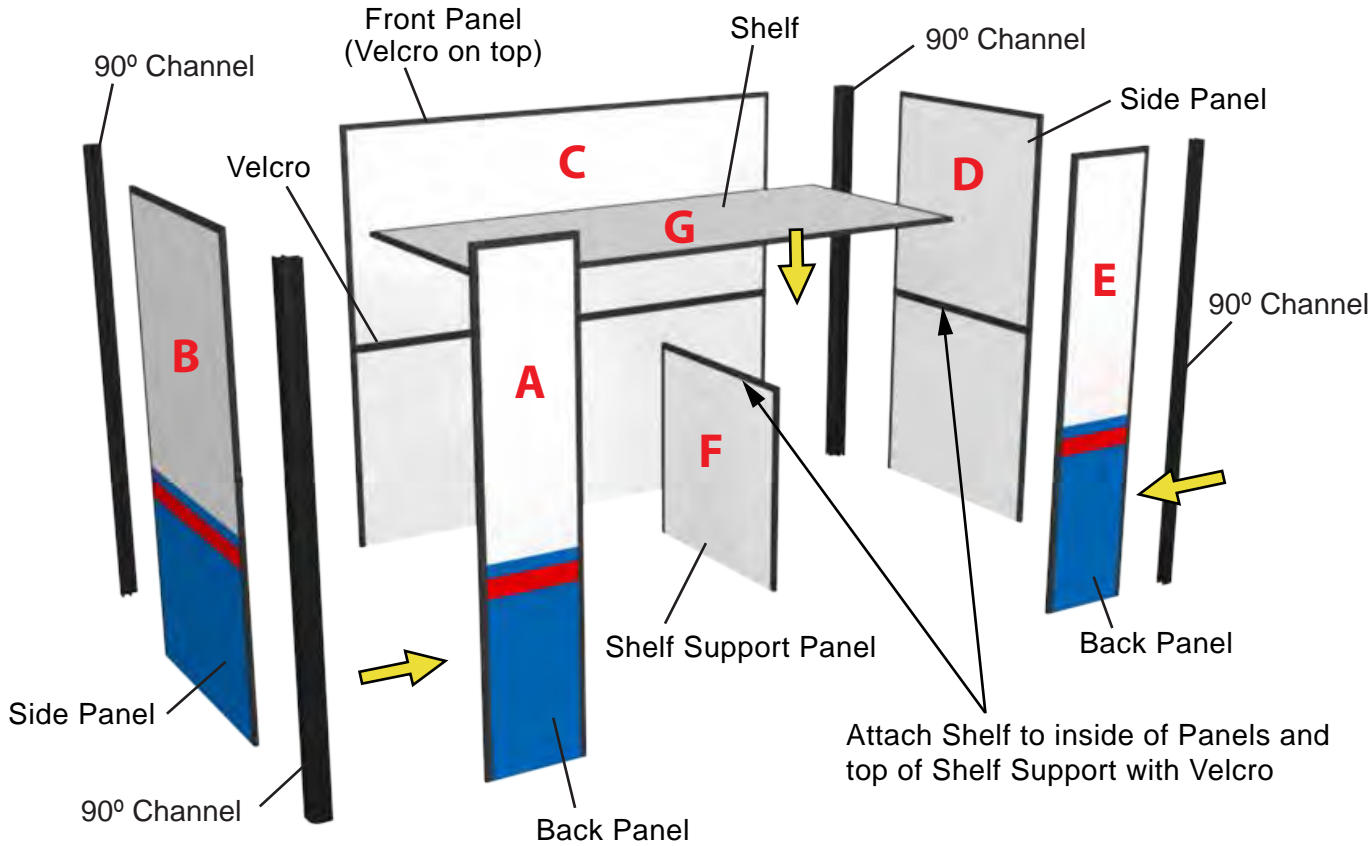

B) Place the Support Bar on top of the Back Panels and attach the Counter Top to the tops of the Panels and Support Bar with Velcro.

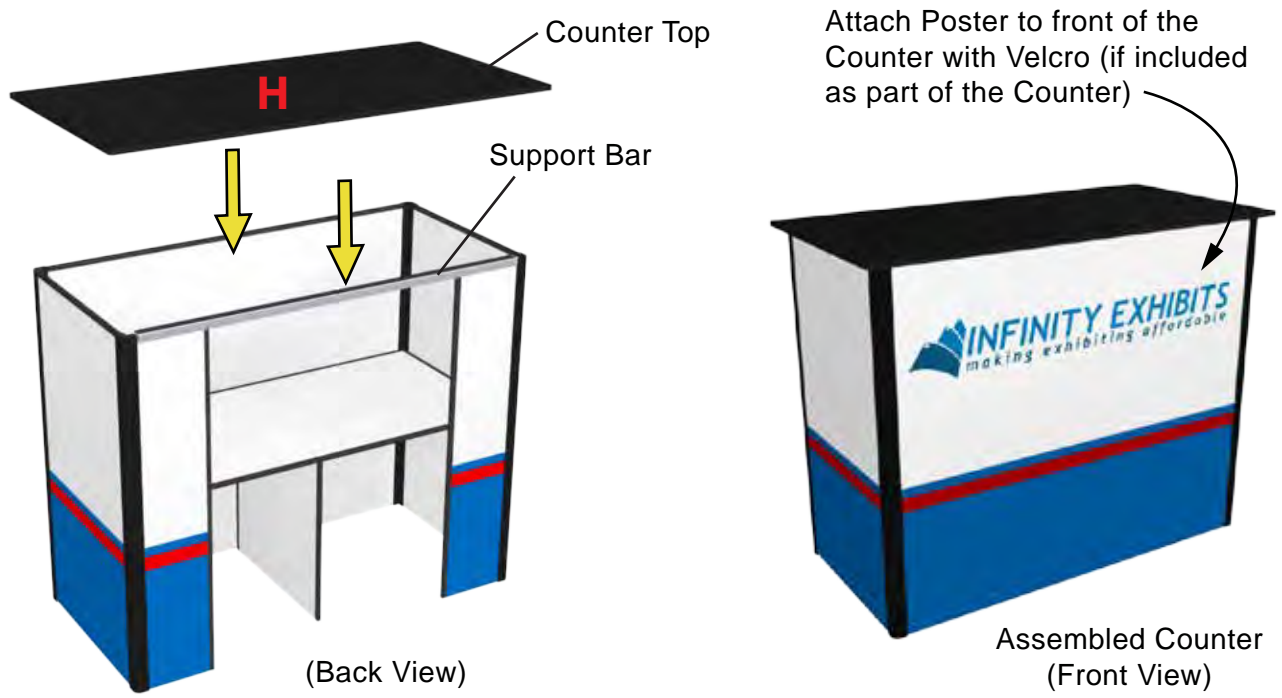

## Assembly Instructions:

## 10'x20' Multi Section Shelf & Poster Display

### Case Layout


Divide the booth components for the 10'x20' Booth and pack the cases in the following manner:



View showing Typical Shipping Cases

### Case


### Booth Components



- 1) Pillars
- 2) Pillar Backs
- 3) Tops & Bottoms
- 4) Signs
- 5) Counter Graphic




View showing Case 1



- 1) Sliding Storages
- 2) Shelf Support Bars
- 3) Posters




View showing Case 2



- 1) Pedestal Tops
- 2) Counter Top
- 3) Pedestal Panels
- 4) Counter Panels
- 5) Panel Connectors



View showing Case 3



- 1) Shelves
- 2) Stem Lights
- 3) Light Support Sticks
- 4) Extension Cords
- 5) Powers Strips
- 6) Wall Panels



View showing Case 4