



Display Setup Instructions




10' x 30' Display Booth



10' x 20' Display Booth



10' x 10' Display Booth

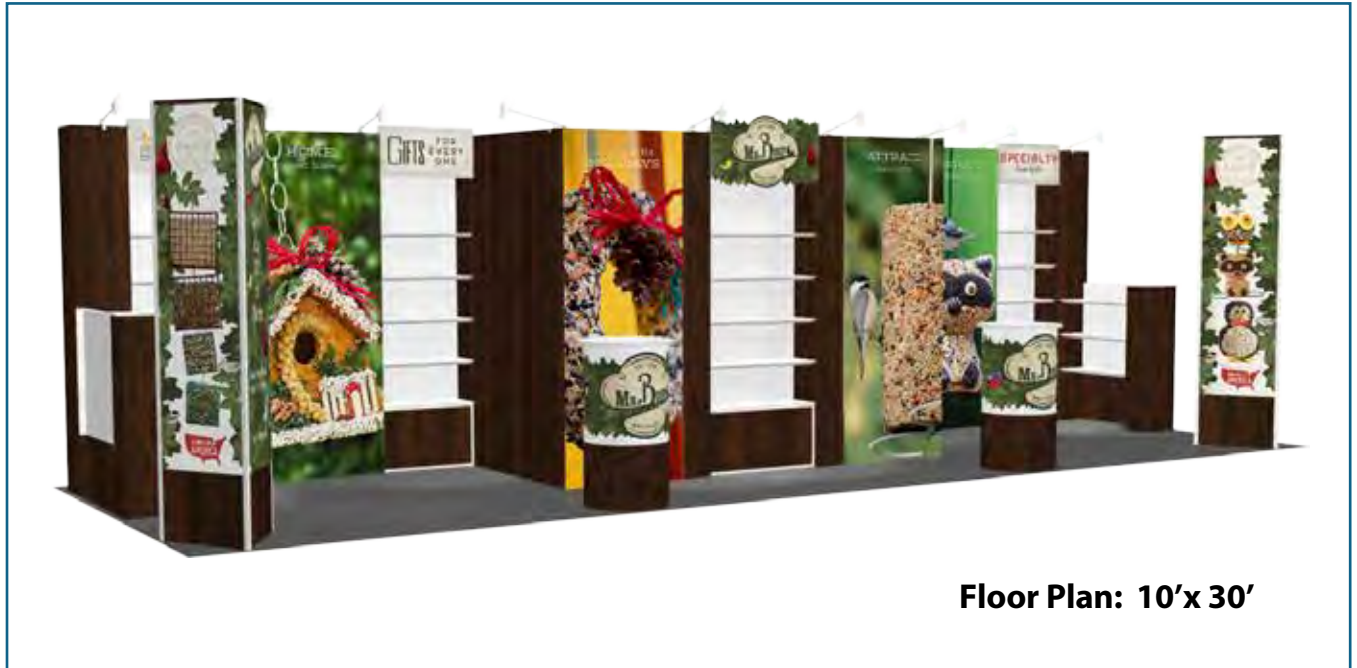


Steps to Assemble the InfiniLite Multi Section Exhibit Booth:

- Step 1:** Assemble the Pillars.
- Step 2:** Place Pillars upright in their proper order.
- Step 3:** Attach Wall Panels to Pillars.
- Step 4:** Install Shelf Support Bars.
- Step 5:** Install Storage Doors.
- Step 6:** Attach Shelves to Shelf Support Bars with Velcro.
- Step 7:** Attach the Signs to the Pillars with Velcro.
- Step 8:** Attach the Posters to the Wall Panels and Pillars.
- Step 9:** Attach the Stem Lights to the tops of the Pillars.
- Step 10:** Assemble the Towers and place them within the Booth Area.
- Step 11:** Assemble the Pedestals and place them within the Booth Area.


NOTE: The alternate Booth configurations for this Booth Display are included within these assembly instructions.

Assemble the Pillars.


A) Unfold the Pillar Panel with the front sides facing downward.

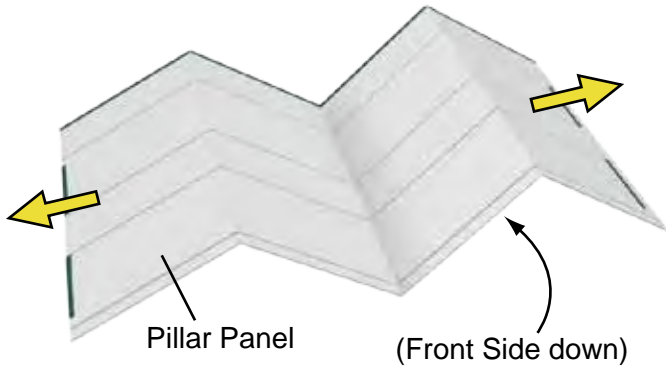



B) Attach Top and Bottom Supports to the back of the Pillar with Velcro.

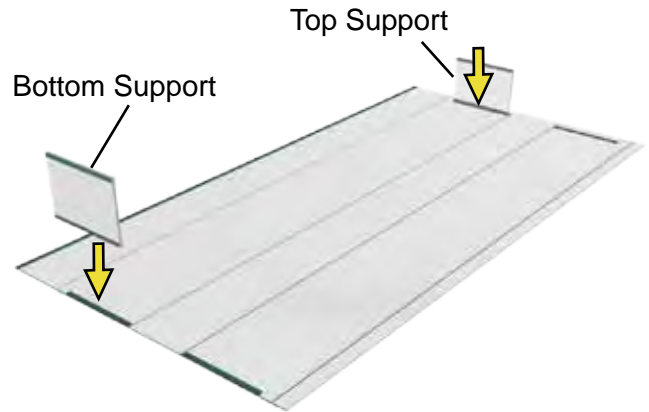

C) Fold Pillar around the Supports and attach with Velcro.

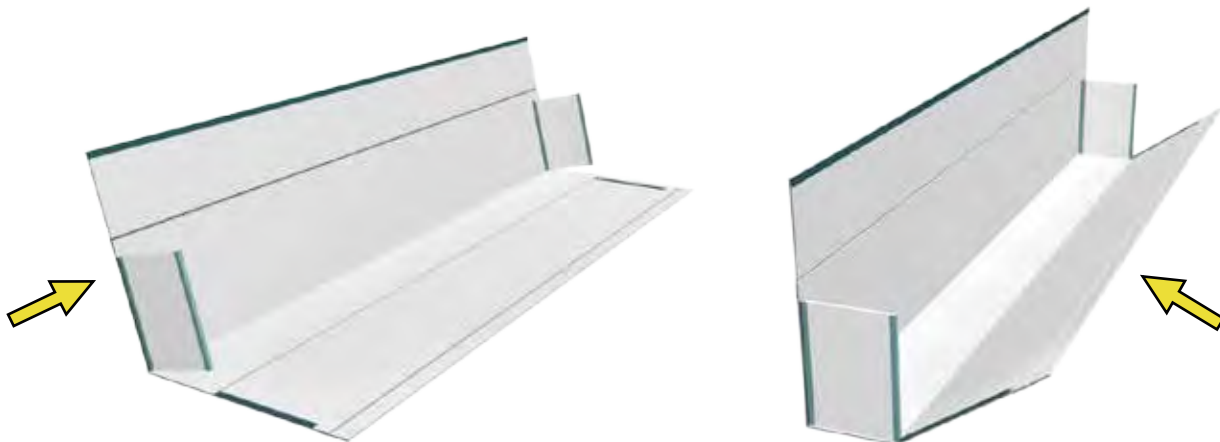


D) Close the Pillar using the Velcro strips along the Pillar edges.

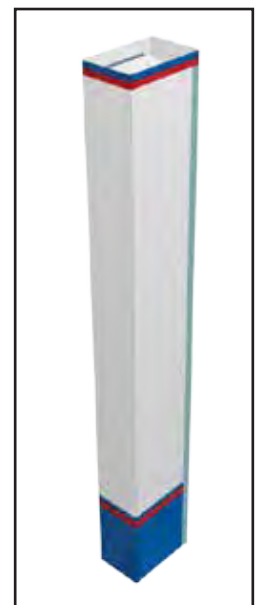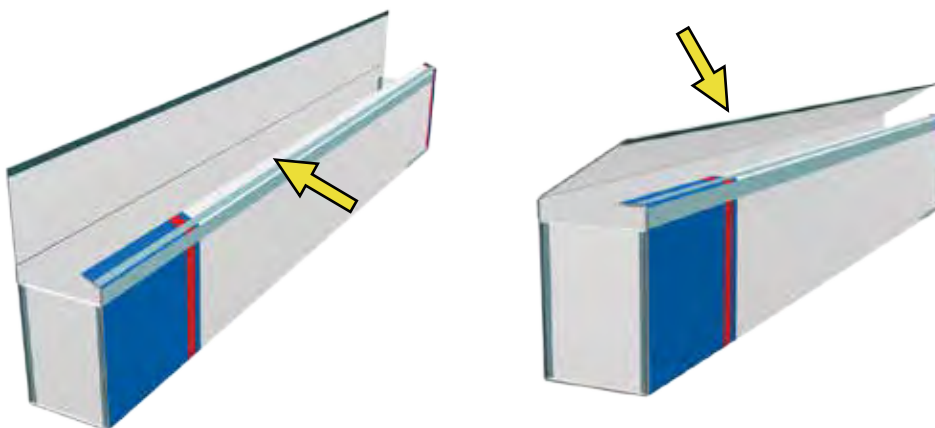


Assembled Pillar

Assemble Corner Pillars.

E) Unfold the Corner Pillar Panels with the front sides facing downward.

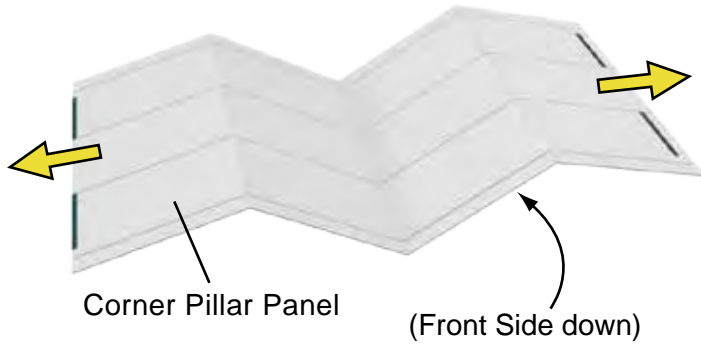


F) Attach Top and Bottom Supports to the back of the Corner Pillars with Velcro.

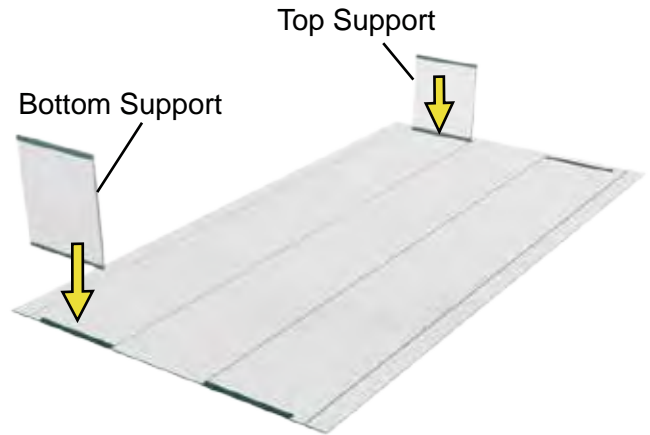

G) Fold the Corner Pillar around the Supports and attach with Velcro.




H) Attach the Back Cover to the bottom half of the Corner Pillar with Velcro; unfold the Back Cover; then attach the remaining Back Cover to the upper half of the Corner Pillar.

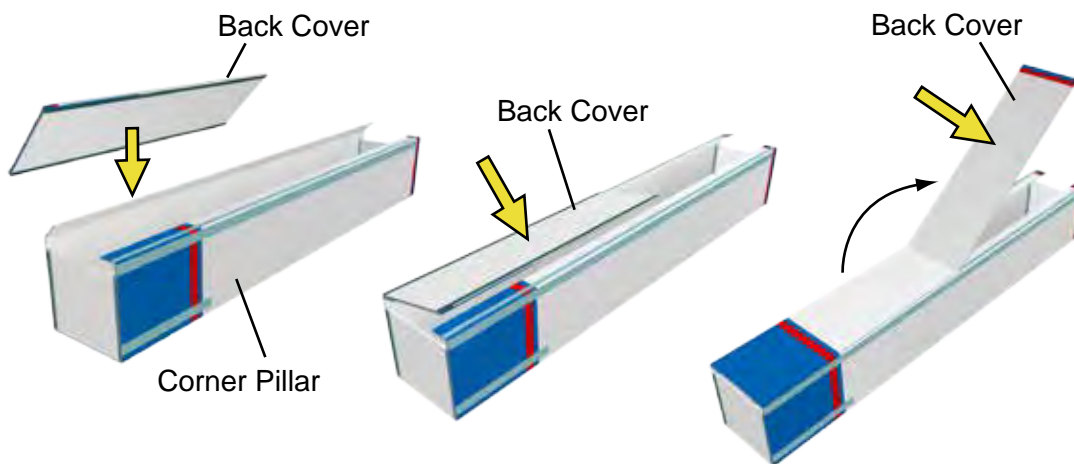


Assemble the Short Pillars.

A) Unfold the Short Pillar Panels with the front sides facing downward.

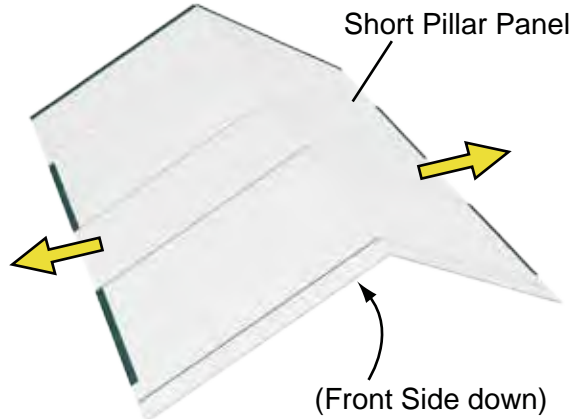


B) Attach Top and Bottom Supports to the back of the Short Pillars with Velcro.

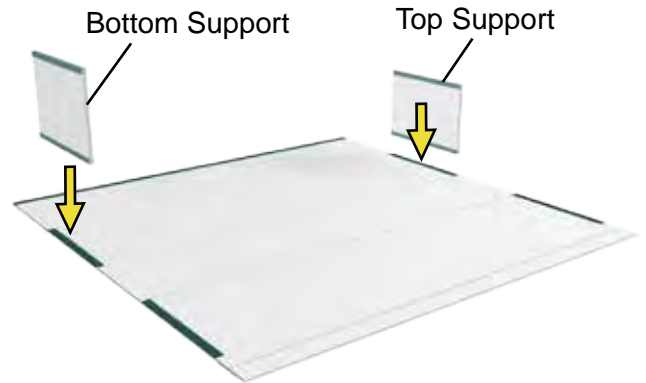


C) Fold Short Pillar around the Top and Bottom Supports and attach with Velcro.




D) Close the Short Pillar using the Velcro strips along the edges.

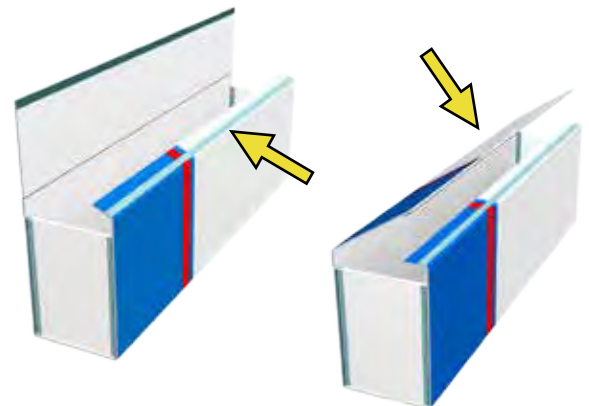

F) Attach the Round Ends to the front of the Short Pillars.

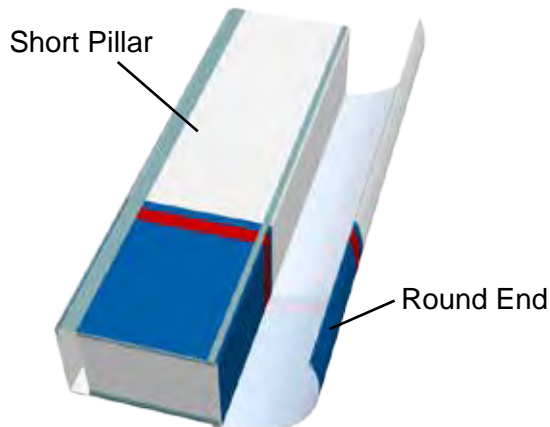

F) Attach Pillar Top to the Short Pillar with Velcro.

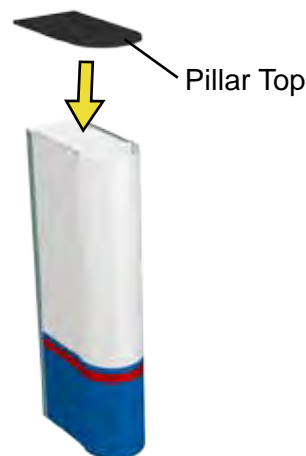


Assembled Short Pillar

Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

The following Floor Plan identifies the locations of the Booth Components when the Display is assembled in a 10'x30' configuration:

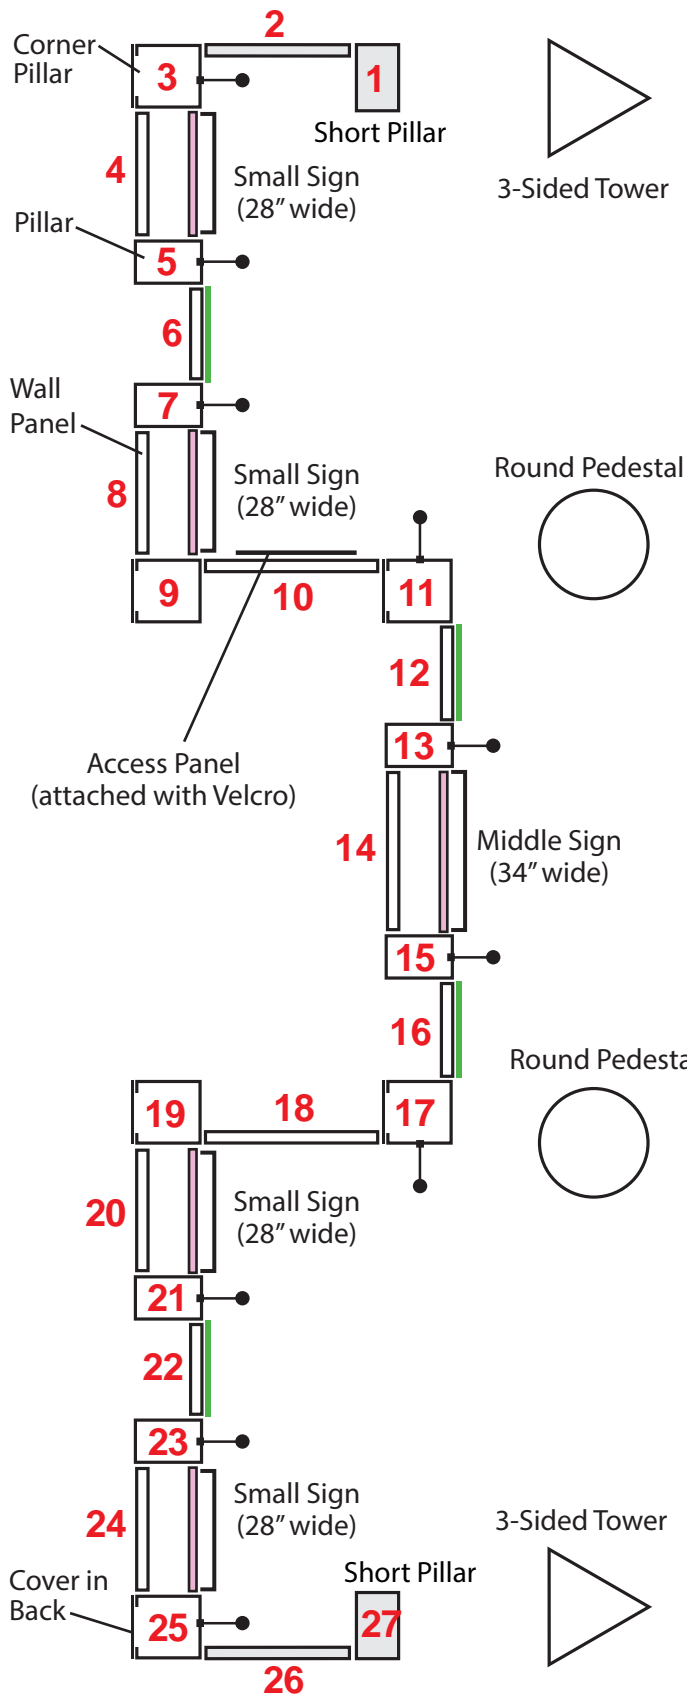

TOP VIEW
Floor Plan: 10'x30'

(Front of Booth)

LEGEND

	Storage Doors
	Poster
	Short Pillar
	Short Wall Panel
	Stem Light


Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

The following Floor Plan identifies the locations of the Booth Components when the Display is assembled in a 10'x20' configuration:



TOP VIEW
Floor Plan: 10'x20'

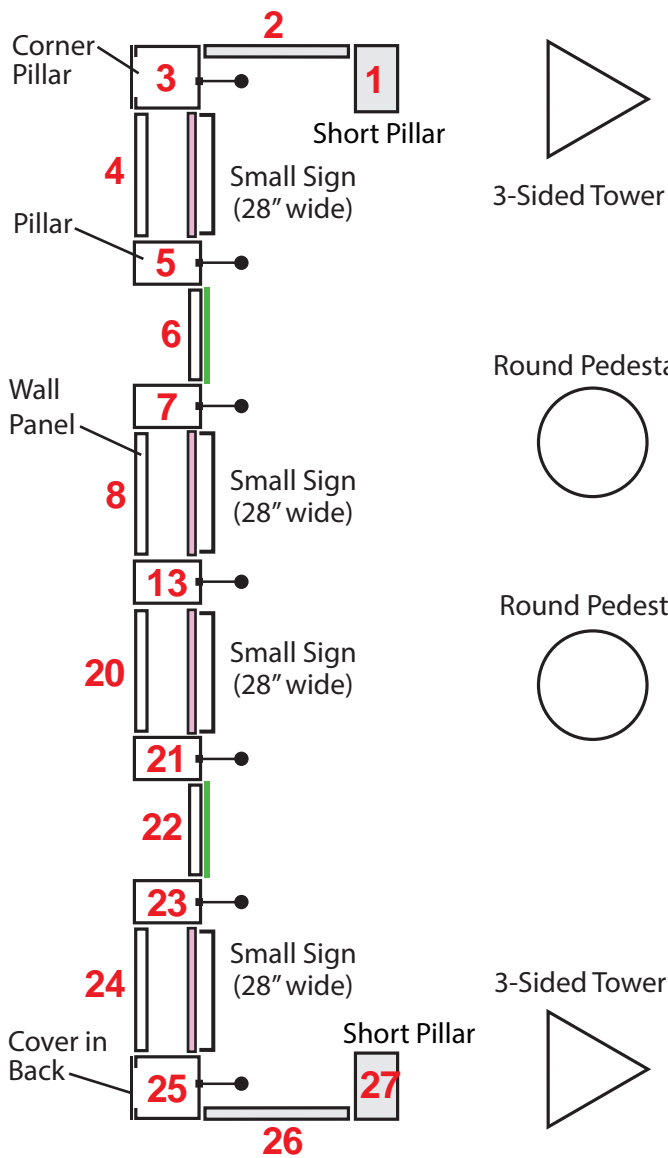

(Front of Booth)

LEGEND

	Storage Doors
	Poster
	Short Pillar
	Short Wall Panel
	Stem Light


Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

The following Floor Plan identifies the locations of the Booth Components when the Display is assembled in a 10'x10' configuration:



TOP VIEW
Floor Plan: 10'x10'

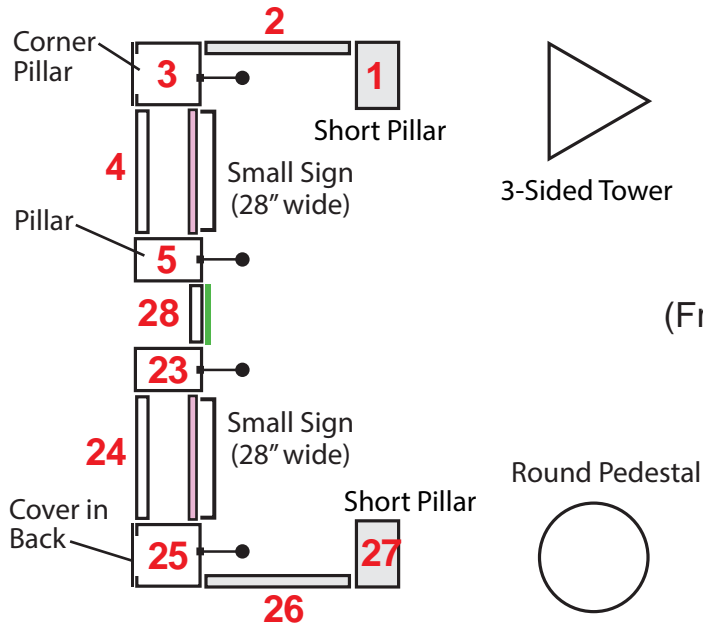




LEGEND

	Storage Doors
	Poster
	Short Pillar
	Short Wall Panel
	Stem Light

Assembly Instructions:


10'x30' Multi Section Shelf & Poster Display

Place the assembled Pillars and Corner Pillars upright in their proper order and assigned locations as numbered and indicated on the Floor Plan.

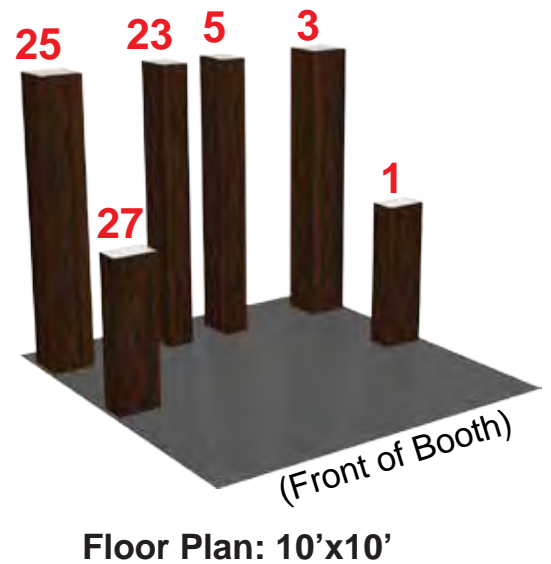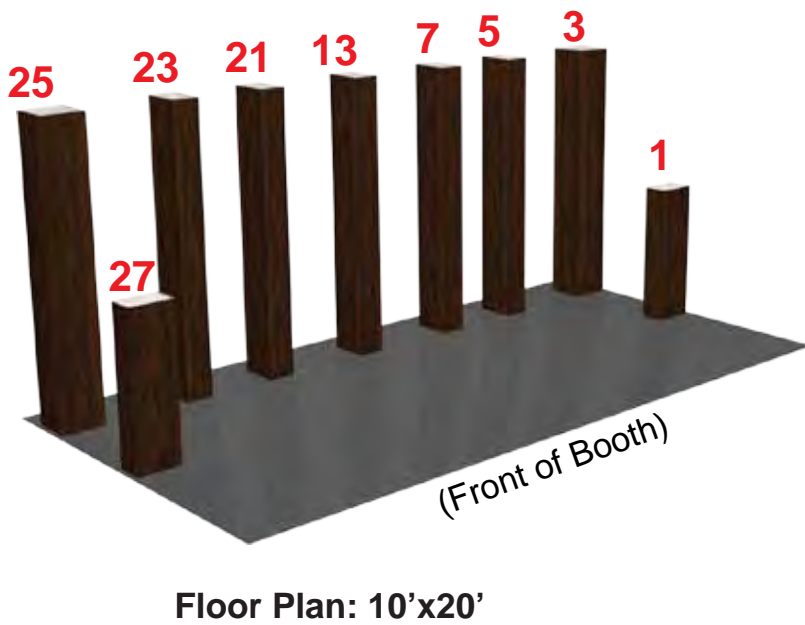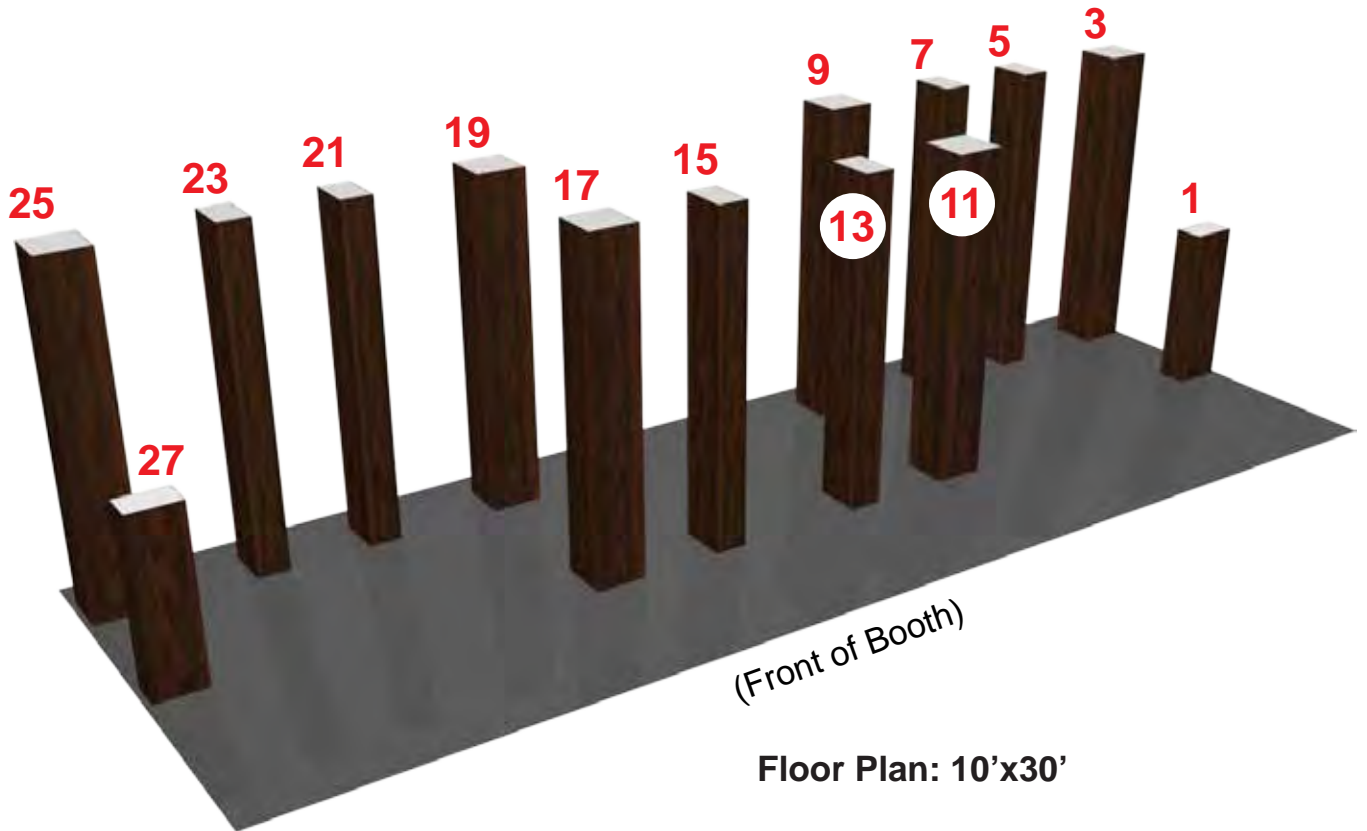


Attach Wall Panels to Pillars.

A) Unfold the bottom half of the Wall Panel, hold upright and attach to Pillar with Velcro. (Make sure that the Pillar and Wall Panel are **flat** on the floor surface when attaching and that the accent stripes are aligned with each other.)

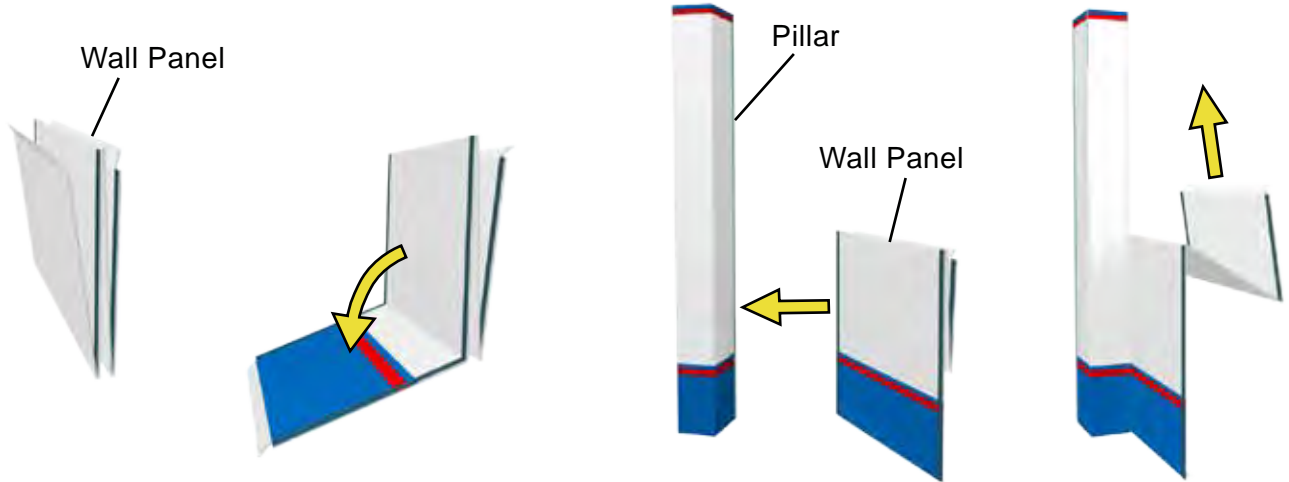

B) Unfold the top half of the Wall Panel and attach it to the Pillar matching the Velcro strips along the edges. Rotate the Wall Panel into position. Attach the next Pillar to the Wall Panel so that it is flat against the front face of the Wall Panel. Rotate the Pillar into position.

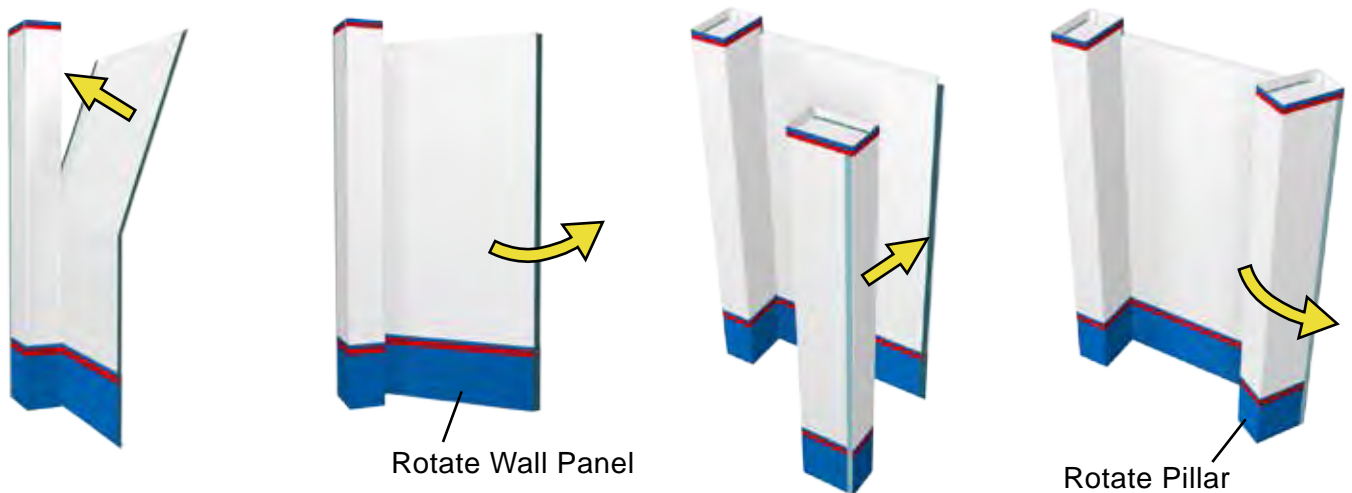

C) Repeat this process with the remaining Wall Panels and Pillars.




Attach Short Wall Panel to Pillars.

A) Unfold the Short Wall Panel, hold upright, and attach to Pillar with Velcro. (Make sure that the bottoms of the Pillar and Short Wall Panel are **flat** against the floor when attaching and that the accent stripes are aligned with each other.)



B) Rotate the Short Wall Panel into position. Attach the Short Pillar to the Short Wall Panel so that it is flat against the front face of the Short Wall Panel. Rotate the Pillar into position.

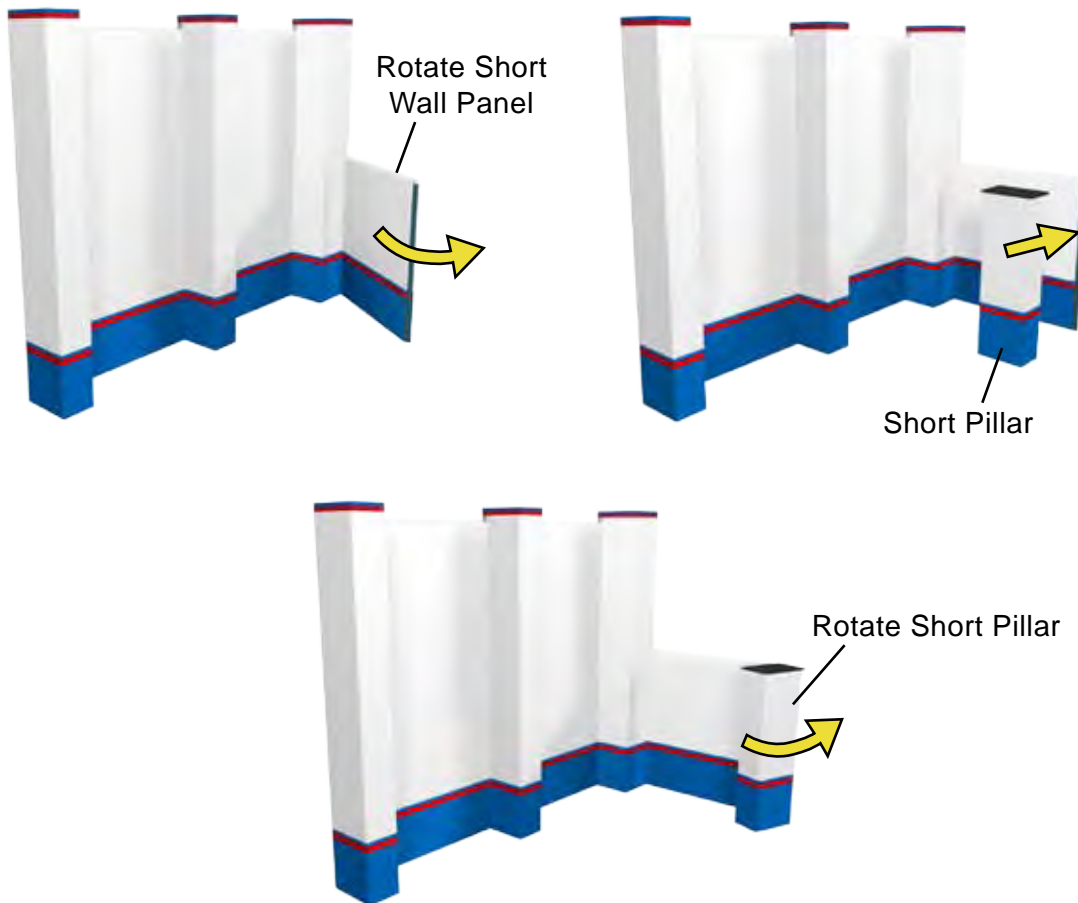

Assembly Instructions:


10'x30' Multi Section Shelf & Poster Display

Install Shelf Support Bars.

A) Insert the shelf support bars into the designated openings in the Pillars.

Make sure that the Velcro on the bars is facing up to attach the shelf.


NOTE: Images on this page show typical installation of Shelf Support Bars, Storage Doors and Shelves.

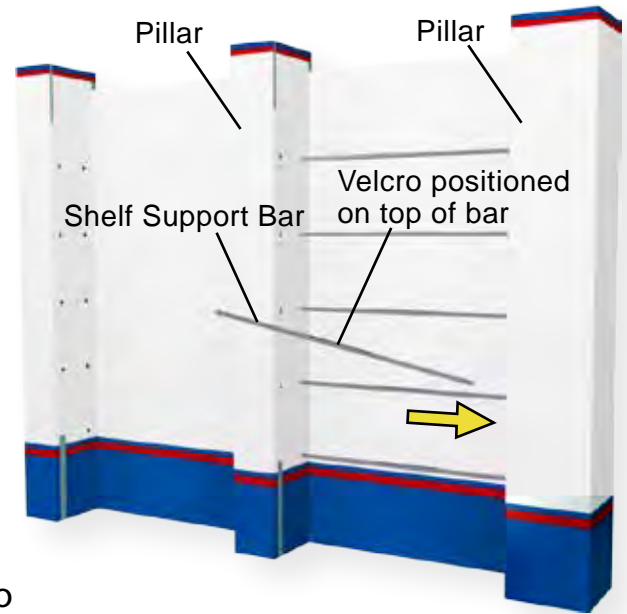

Install Storage Doors. (Attach Storage Doors to the inside of the Pillars with Velcro.)




Attach Shelves to Shelf Support Bars and top of Storage Doors with Velcro.

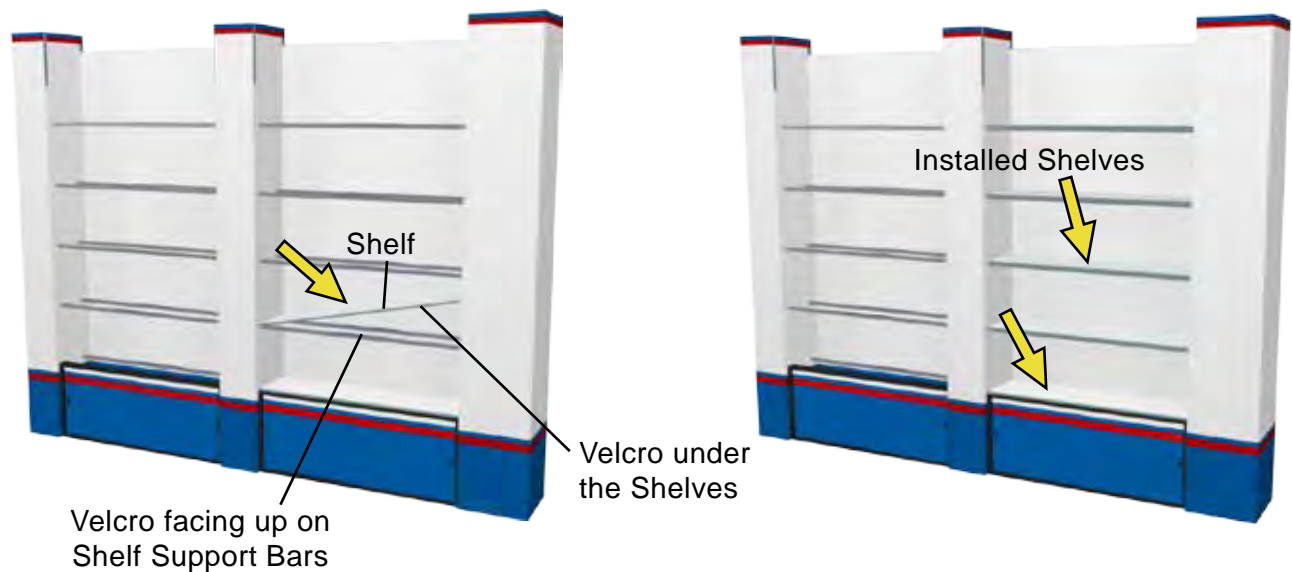

Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

Attach the Signs to the inside of the Pillars with Velcro.

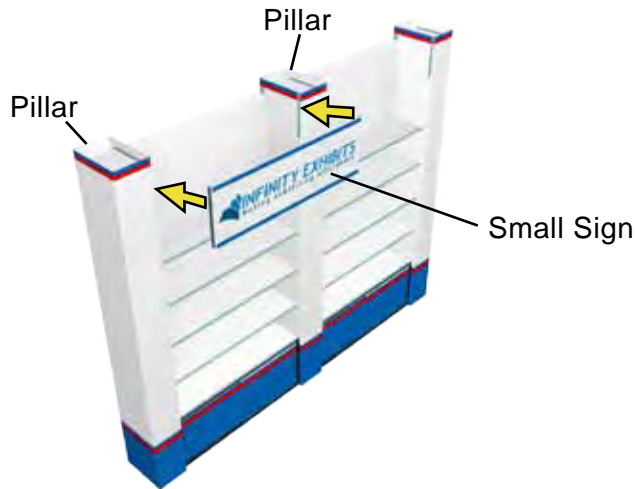


Attach the Posters to the Wall Panels and Pillars with Velcro.



Attach the Stem Lights to the tops of the Pillars.

A) Place a wooden Light Support Stick on top of the proper Pillars as shown. (Use a ladder or step stool to access the top of the Pillar.) Secure the Stick to the back of the Pillar with a Binder Clip.

B) Attach the Stem Light to the front end of the Pillar and Support Stick by adjusting the thumbscrew on the back of the Stem Light. (**DO NOT** overtighten the thumbscrew. Overtightening the adjustment thumbscrew may damage the Pillar.)

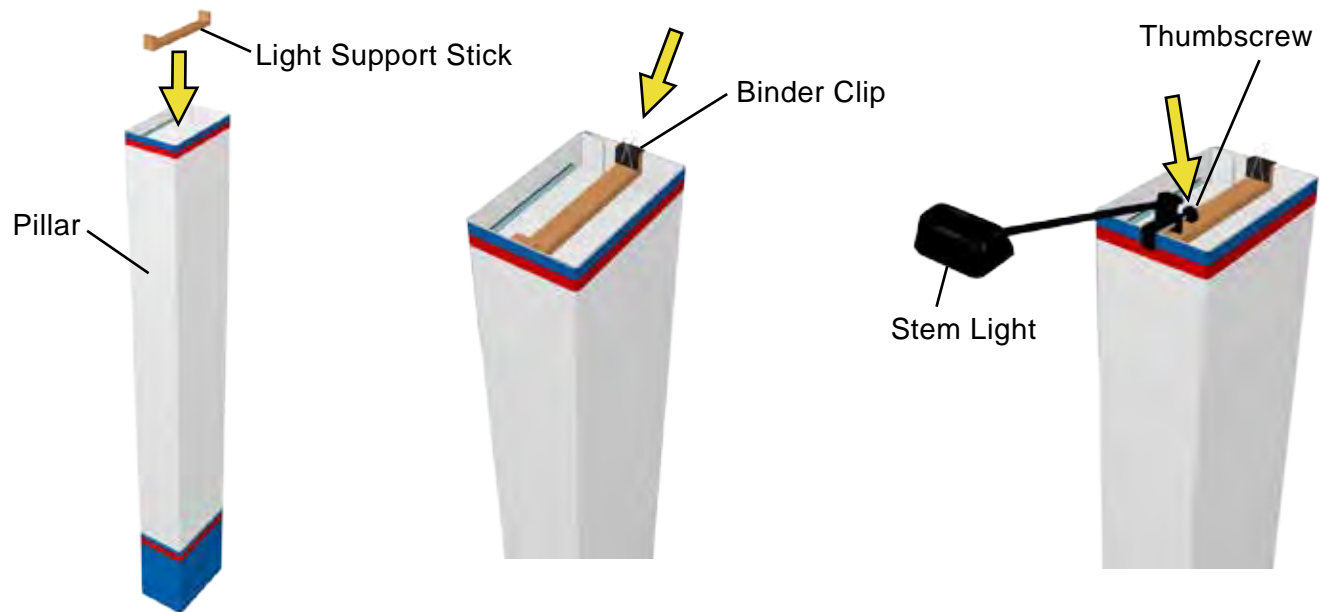


Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

Assemble the 3-Sided Towers in the following manner:

A) Unfold a Tower Panel. Attach a 50" Channel to the base and continue working upwards. Attach a 46" Channel on top of this one.


B) Unfold a second Panel and attach it to these Channels starting at the base and work upwards until it snaps in place.

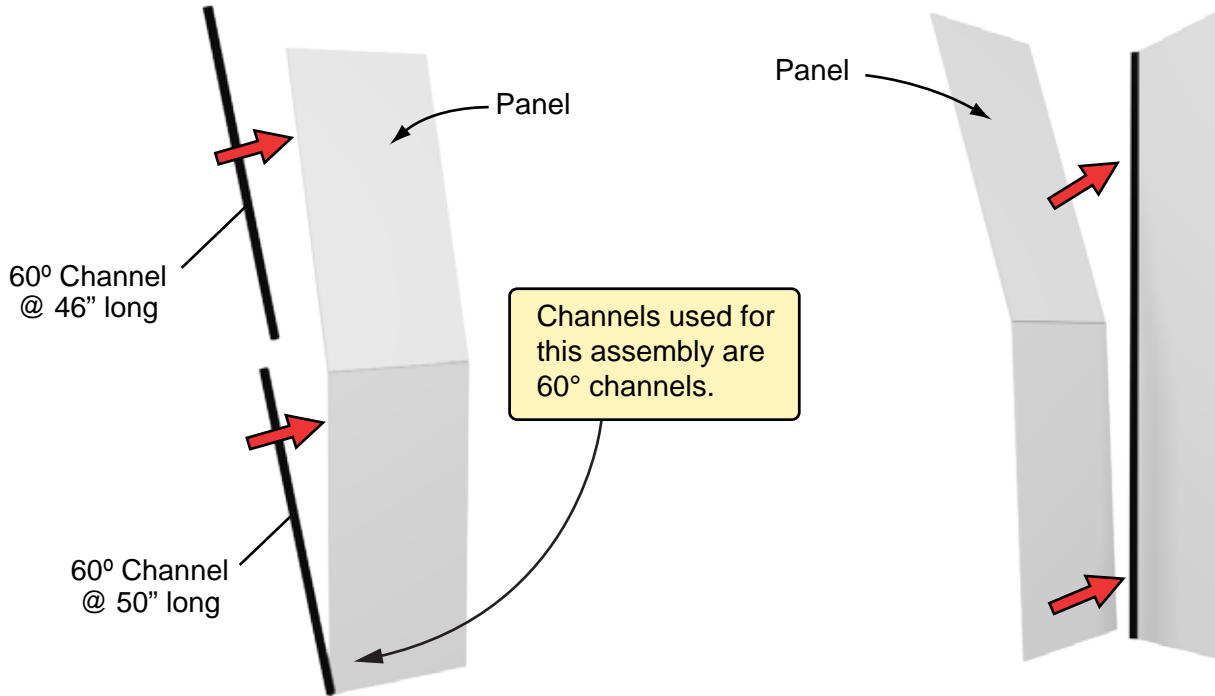

C) Continue attaching the Channels and Panels in this manner until the third set of Channels.


D) Attach the third set of Channels by sliding them down the two connecting Panels from the top.

E) Unroll the Posters and attach to outside of Panels with Velcro.

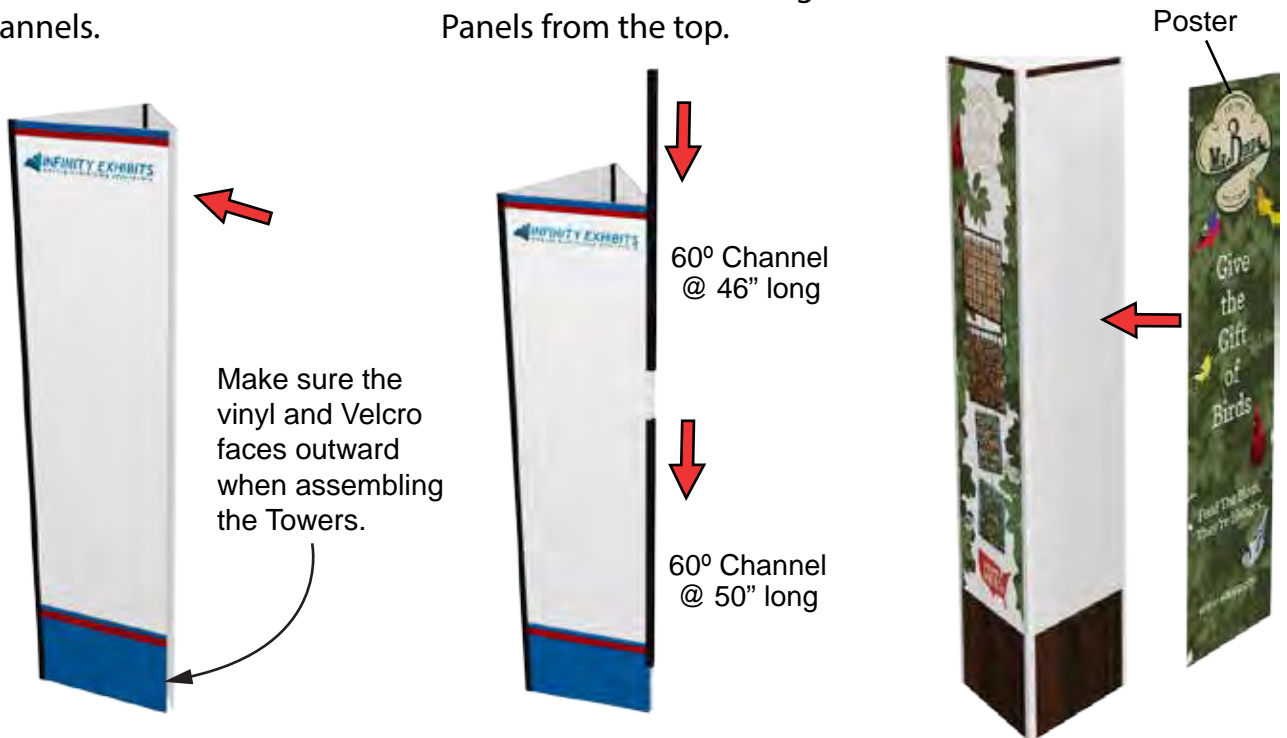


Assemble the Round Pedestals.


A) Place the Bottom Round Panel (one side with Velcro) on the floor with the Velcro side up. Attach one Leg to the Bottom Round Panel with its slot facing up. Orient the second Leg with its slot facing down, insert it into the first Leg, and attach to the Bottom Round Panel.

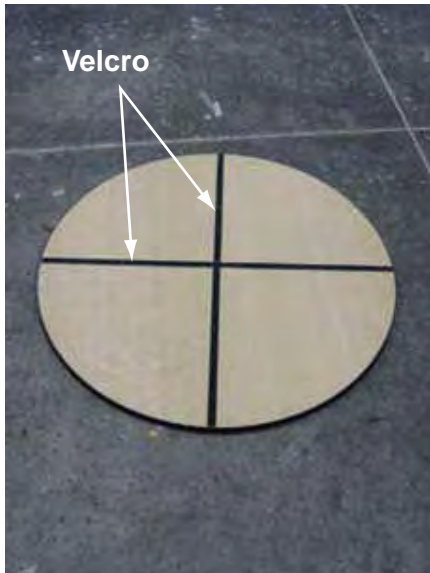

Bottom Round Panel

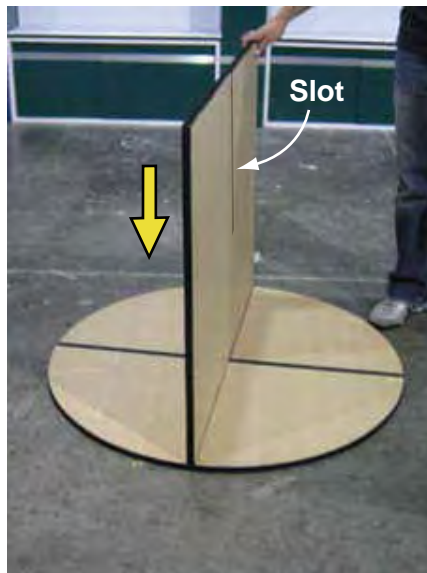

Leg with slot facing up

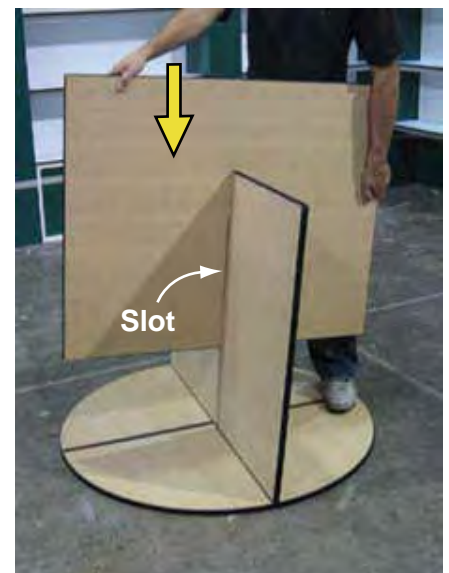

Leg with slot facing down

B) Attach the Top Round Panel (two sides with Velcro) to the top of the Legs with Velcro.



Top Round Panel

C) Attach the Plastic Panel Wrap along the edges of the Top and Bottom Round Panels with the Velcro strips.




Plastic Panel Wrap


Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

D) Attach the Pedestal Skirt (skirt with logo) to the Pedestal Panel Wrap along the edge with the Velcro strips.

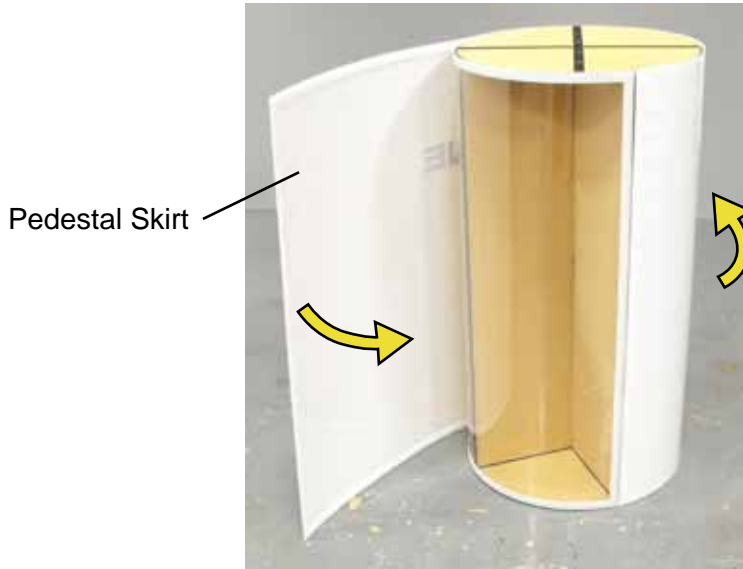

E) Attach the Pedestal Top to the Top Round Panel with Velcro.

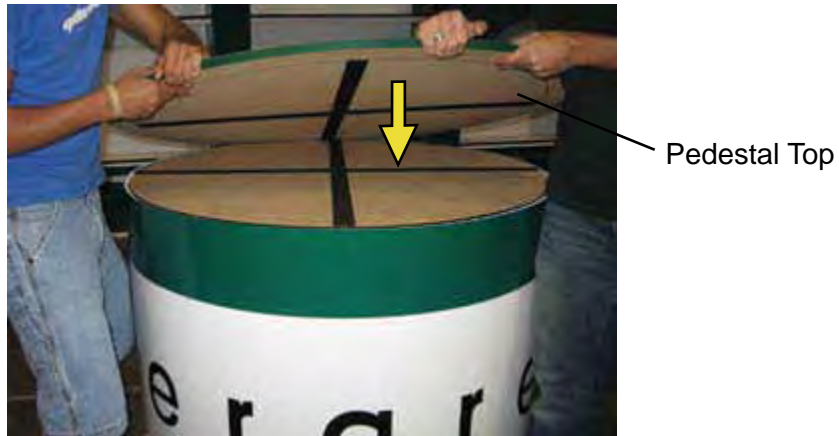

Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display

Shipping:

A) The 10'x30' Display Booth is packed in one (1) Shipping Tub and four (4) Shipping Cases.



10' x 30' Display Booth

Shipping Tub

Shipping Cases

B) Divide the booth components and pack them into the Tub and Shipping Cases. A typical case packing technique is shown below:

<u>Case</u>	<u>Booth Components</u>	
1	<ol style="list-style-type: none"> 1) Pillars 2) Pillar Backs 3) Tops & Bottoms 4) Signs 5) Graphics 	<p>View showing Case 1</p>
2	<ol style="list-style-type: none"> 1) Sliding Storages 2) Shelf Support Bars 	<p>View showing Case 2</p>
3	<ol style="list-style-type: none"> 1) Pedestal Tops 2) Pedestal Components 3) Tower Panels 4) Panel Connectors 	<p>View showing Case 3</p>
4	<ol style="list-style-type: none"> 1) Shelves 2) Stem Lights 3) Light Support Sticks 4) Extension Cords 5) Powers Strips 6) Wall Panels 	<p>View showing Case 4</p>

Assembly Instructions:

10'x30' Multi Section Shelf & Poster Display


C) Identify and pack only the needed components into the Shipping Tub and/or Shipping Cases (as desired) when shipping the Display as a 10'x20' or 10'x10' Display Booth.



10' x 20' Display Booth




Shipping Tub



Shipping Cases


(sample shipping combination)

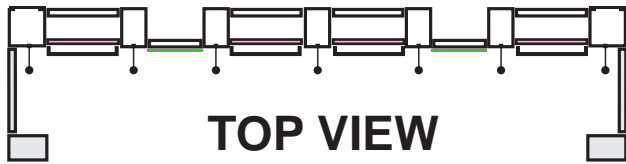

TOP VIEW




10' x 10' Display Booth



Shipping Cases

(sample shipping combination)

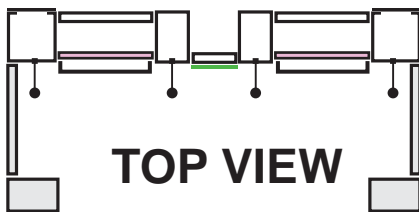

TOP VIEW

